February 1979 45p
(U.S.A & Canada $2.00)

Model Mechanics

MAP HOBBY MAGAZINE

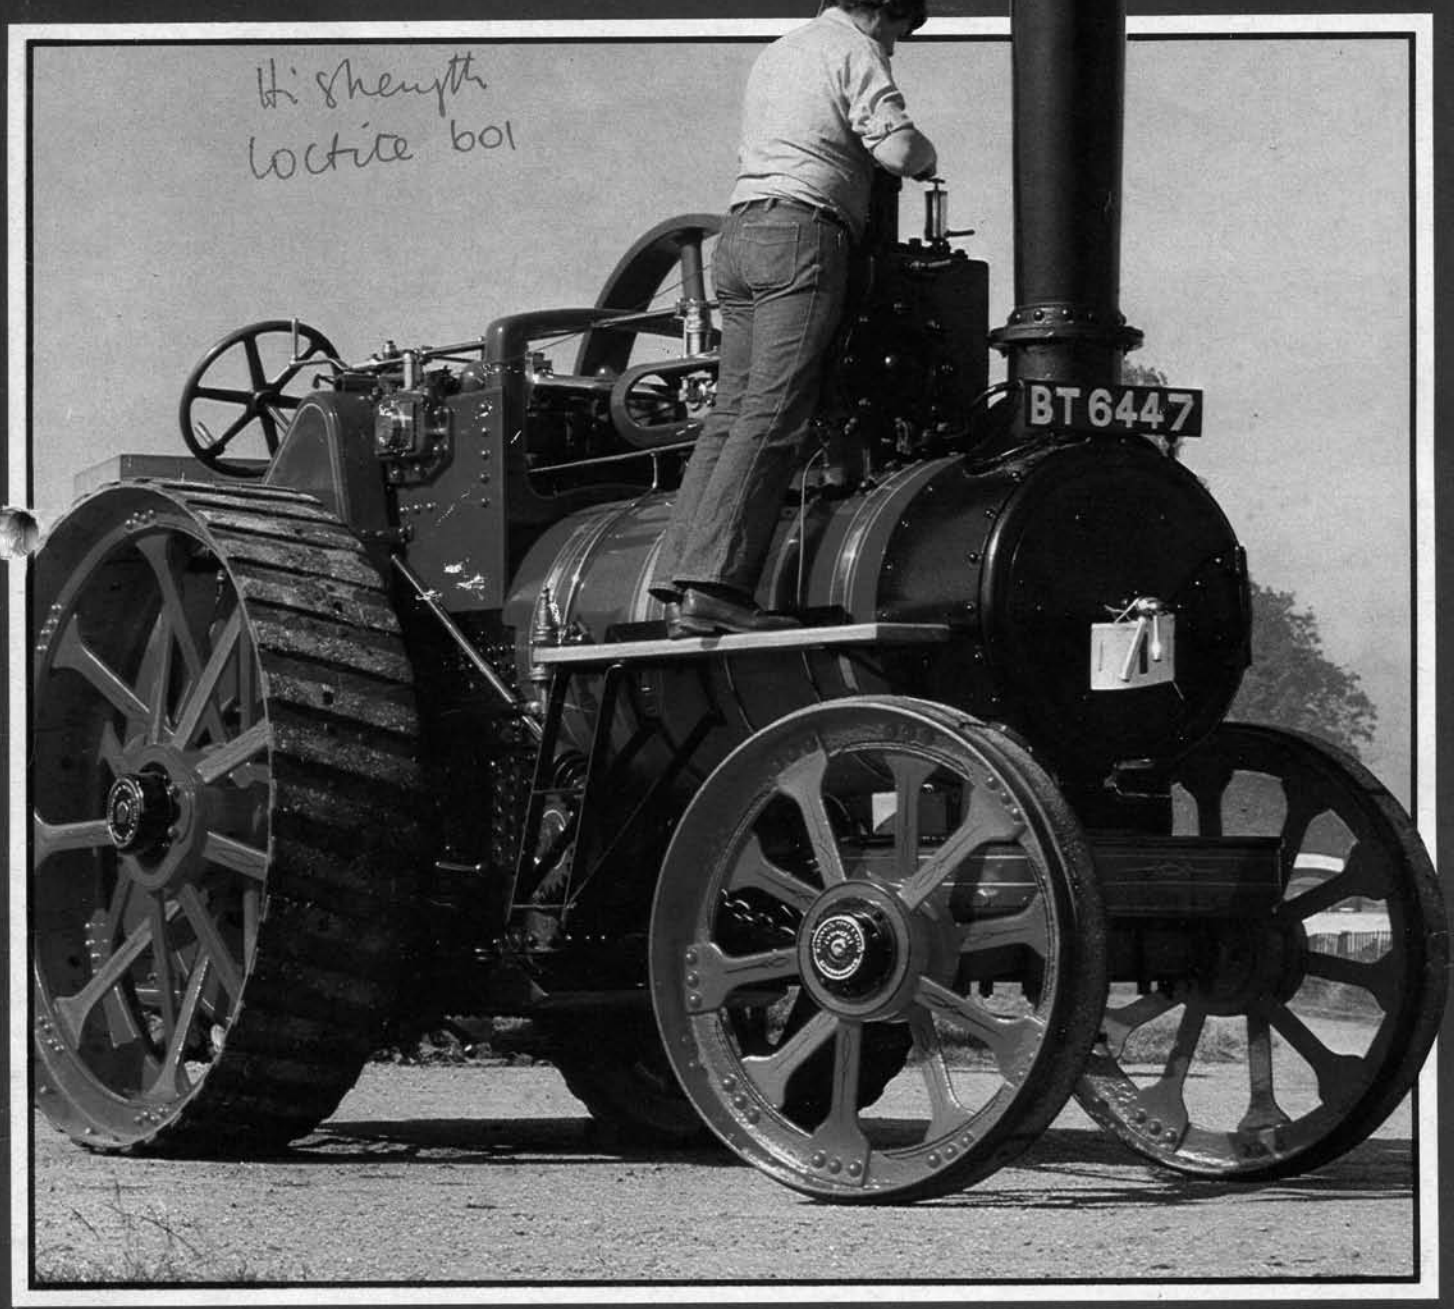

SIMPLE STEAM • TOOLS OF THE TRADE
TETHER RACING CAR • CASS RAILROAD

has the works made from a piece of $\frac{5}{32}$ in. copper tube and this is very satisfactory. It is available from all model engineering supply shops but if this proves difficult it should be possible to get a length of Bundy tubing from one of the bigger garages or service centres. This is a little bigger in diameter but you will only need about 18 in. or so. The centre 10 in. or thereabouts of whatever pipe you have must now be softened by heating. If you have it, a gas (or even a paraffin) blowlamp is fine, if not then a domestic gas ring will be hot enough to raise the tube to a dull red heat — it can be done in sections. This will soften it and after cooling (either by plunging into cold water or just letting it cool naturally, it doesn't matter which) find a bar about $\frac{3}{8}$ in. diameter — a wooden spoon handle might do — and carefully wrap three and a half turns round it as shown in Fig. 8 bringing the two ends together roughly parallel and of the same length. They will be something like an inch apart depending on the diameter of the tube. And that is the engine! The coils are necessary to provide a large enough hot zone to allow the device to work. A simple U seems to be satisfactory for $\frac{1}{16}$ in. diameter tube; the $\frac{5}{16}$ in. diameter tube in the Jetcraft launch requires five or tix turns on a 1 in. mandrell. About three coils as described seem about right for $\frac{5}{32}$ in. or $\frac{3}{16}$ in. tubes.

A means of heating is now required and this can be either a simple holder for a piece of Meta, Esbit or Mamod solid fuel or a small methylated spirit lamp. The latter is in many ways preferable since it will give a longer run but the solid fuel is perhaps more convenient. Fig. 9a shows a simple holder bent up from a small piece of tinplate. If you are a good soft solderer it is not too difficult to make a suitable spirit burner. A convenient basis could be a small tin, say 2 in. or so diameter which would fit into the forward part of the hull. This might have to be cut down to about ¾ in. high with a new lid soldered on with a filler hole and a cap. The burner tube should be as long as possible to take the flame well away from the fuel tank. The tube should be well packed with cotton wick, so adjusted to give a flame not more than about ¾ in. high. A suggested form of such a burner is sketched in Fig. 9b.

Since we shall want some tin for the floor and the deck house of the engine room it might be worthwhile seeking out a sizeable domestic can to be saved from the dustbin. A stout pair of scissors (in the absence of tinsnips) will soon produce a useful sheet of material. The deck house over the engine room is made from just such a flattened sheet of tin (or aluminium would be even better) cut out and bent up as shown in Fig. 10. Holes should be drilled (about $\frac{5}{16}$ in. diameter) in the sides before bending and a hole for the funnel cut and filed to size in the roof. The funnel can be an aluminium tube — perhaps a tablet holder from the chemist will be found of an appropriate size — and this must be fastened to the roof. The amount of heat generated should not be too much but even so glues, or even soft solder if a tin funnel is made, are not very satisfactory at this point. It will be best to cut tabs on the bottom of the funnel and clip or rivet these to the roof to supplement what should be a push fit on the tube.

Fig. 9a

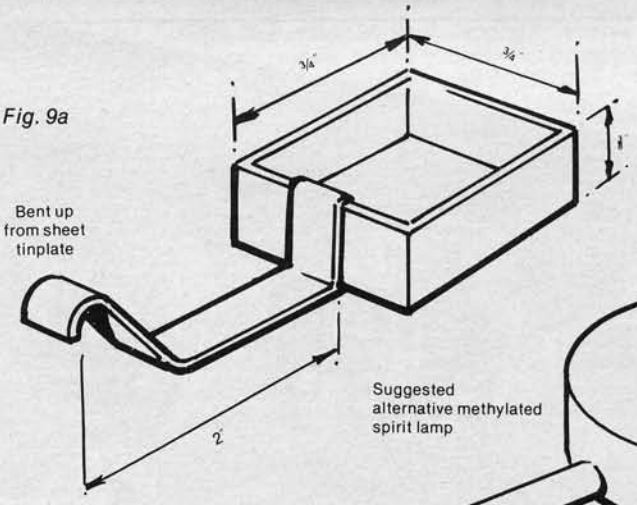

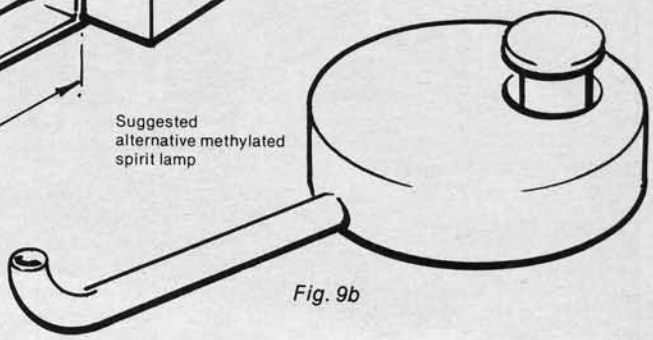

Fig. 9b

Fig. 10

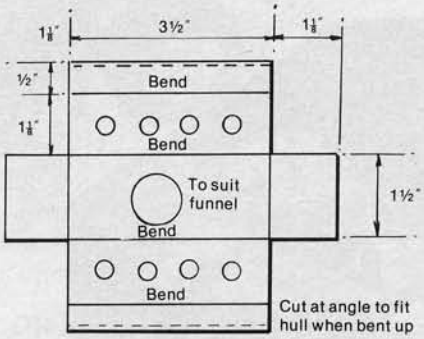

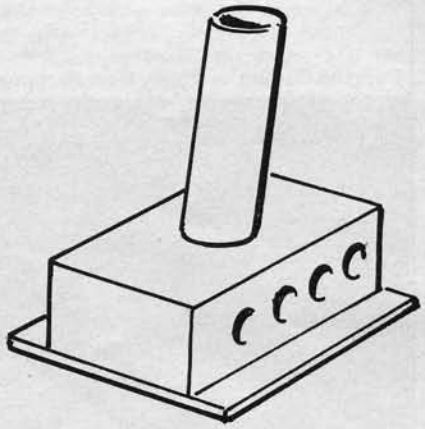

The time has come for a little experimenting in the bath. For the engine to perform satisfactorily it is necessary for the two tube ends to come out not more than $\frac{1}{16}$ in. below the waterline. So, fill the bath, put the coiled pipe on board in roughly the right position together with the fuel holder, the rudder and a tin sheet about 3 in. long to put the lamp on. Then fit the superstructure and funnel and float the vessel so as to determine the position of the waterline — the balsa awning can be ignored at this stage since it is so light. Add any small pieces of lead that may be necessary to get her trim right and mark with some accuracy the waterline on her stern. Equidistant from the centreline drill two holes to fit the tubes at the angle indicated to bring the coil high enough off the bottom to get the lamp underneath. These can then be set in with plenty of epoxy so as to leave about ¼ in. of tube sticking out at the back. Now the rudder can be fitted and the top of the wire bent over to form the tiller. Any fine adjustments of trim can now be made to get the tops of the tubes a fraction of an inch below the water on her first trials. And there is no reason why these should not take place right away. First, however, to be on the safe side fit the piece of tinplate to make a 'floor' to the engine room to protect the wood from the heat. Put the fuel holder on it in place underneath the coil, mark the middle of the sides and drive in four brads leaving them standing proud by about ¼ inch. This will fix the floor and provide a location into which the fuel holder can be dropped. Next introduce a small amount of water into the tube. One of the early boats in my collection was sold complete with a rubber pen filler for this job, the instructions referred to it as a 'supercharger', but it is just as effective to hold it under the tap. Then light a small block of fuel and place under the coil. After a few moments this will heat up and a series of bubbles will come out of the tube ends. Suddenly the whole vessel will come to life with a sort of shuddering series of pops and gurgles and the jets will be in action. She will move off at a dignified pace and run until the fuel gives out.

When her first steam trials have been satisfactorily completed the forward deck, of $\frac{1}{8}$ in balsa, can be glued into position. Any seating desired can also be added to increase her realism and the canopy of balsa or thin card, as are the edges of the awning, can be made and supported by three wires cut from an old coathanger. These are fitted into holes drilled through the deck and into the stem block but be careful not to go right through!

Daisy will well repay some pretty paintwork — perhaps a pale cream above the waterline, sea green below with a white canopy and a red funnel. She is really at home on an indoor pool but on calm days outside she will be found an attractive and a reliable boat which will attract a lot of interest from those who do not know her secret.

Start of a race at Wrexham Circuit

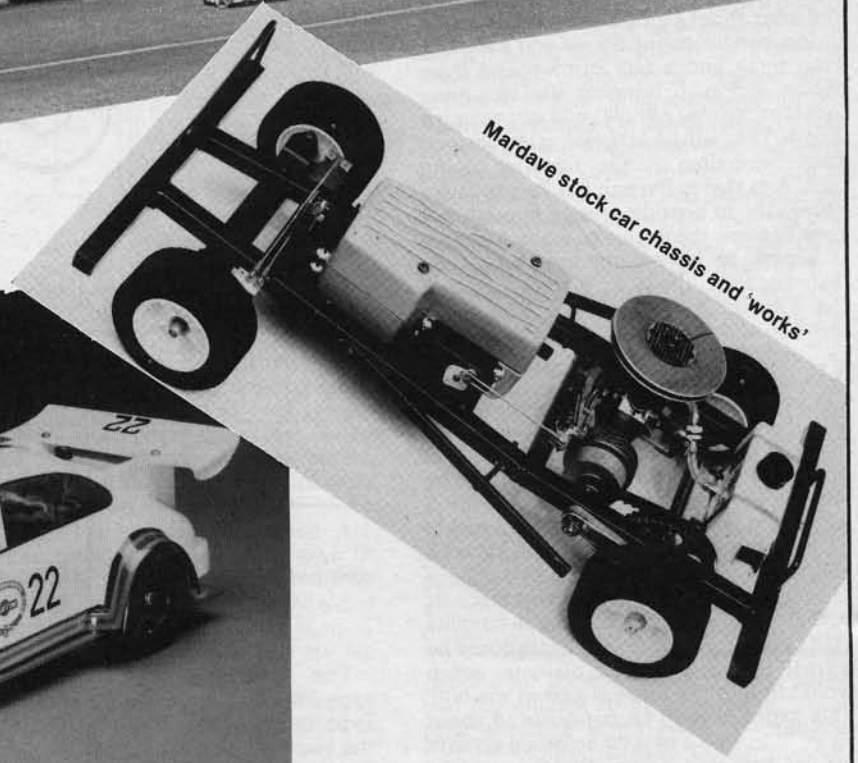

Mardave stock car chassis and 'works'

Porsche Carrera — a body from Graupner

Mardave BRM electric

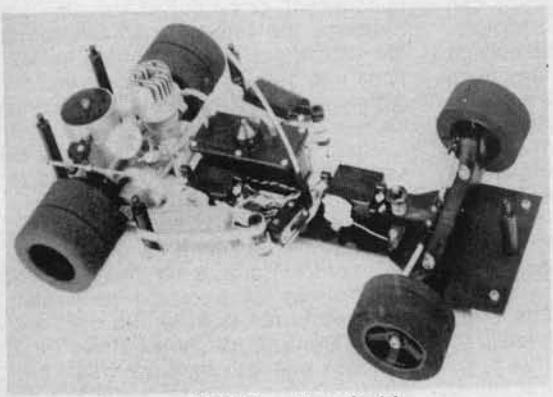

Best in Europe — PB International with MacGregor radio. Latest has a PB differential.

Put yourself in the driver's seat!

RADIO-CONTROLLED MODEL CAR RACING

by
'Dickie' Laidlaw-Dickson

MODEL CAR RACING could well become one of our most popular modelling hobbies as it happily combines both the pleasure of building the model with the very special thrill of actually controlling it entirely throughout its run. This same pleasure is, of course, also enjoyed in both r/c aeromodelling and boating but not I think with the same degree of really intimate contact. To put it in a nutshell model car racing can be enjoyed with much of the excitement but little of the cost and none of the personal risk of full-size motor racing.

It is now possible to produce in miniature very nearly all the manoeuvres of the full-size racing car, with fast cornering, four-wheel drifts, massive acceleration — only a racing motorcycle can beat it up to 60 m.p.h.! — passing and re-passing, pit stops for re-fuelling, team events, endurance trials — a 24-hour, 500 mile record has been recently set up — in fact you think of it, someone is doing it! There has even been a *steam* powered car on the track — shades of the veteran White Steamer — though not exactly a racing vehicle.

This country is fortunate in having more purpose-built racing circuits than any other, thanks to the co-operation of many local authorities and big landowners who have made land available; the rest has been up to willing club members to build their circuits by sheer hard work. Organisation which is so essential to provide a well assorted programme and to establish sensible rules is handled by the British Radio Car Association, a National body which M.A.P. played an early part in establishing with its inaugural race meeting in 1971 and subsequent discussions at Hemel Hempstead. There is also a European body — EFRA, which stands for European Federation of Radio-controlled Automobiles to which nearly every country in Europe belongs, embracing some fourteen national bodies. This enables international racing to take place throughout the season with each country holding its Grand Prix to which member countries are invited, and a grand European Championship taken in turn by the various nations. Finally, World Championships have been established, the first was in California in 1977, the next will be in Geneva next July.

But let us get down to the actual cars and see how the beginner can make a start.

The choices before you

There are two main racing divisions: $\frac{1}{8}$th scale glow-plug powered cars which have a capacity limit of .21 cu. in. (3.5 cc) and 1/12th scale electric powered cars which again conform to an electric motor capacity with a voltage limit of 7.2v (6 nicad cells). The glow-plug cars divide into Sports/GT, the more popular class, and Formula 1 (like full-size Grand Prix cars). Until the introduction of electric car racing it was usual for racing to close down in the winter months, except for one or two hardy individuals, and then start again in the spring. But the electrics have made it an all the year round activity by the use of halls, badminton courts, indeed any indoor flat area of tennis court size to provide room for a track of say, 150 ft. per lap.

The glow-plugged $\frac{1}{8}$th scale cars are the "kings of the raceway" and so tend to attract the beginner in the first place. There is happily a whole range of accessories and equipment at a wide price band to suit nearly everybody. Simplest of all to make, and cheapest to buy, is a Mardave kit. This comprises a flat alloy chassis plate on which a steering unit is mounted at the front, and a stout pair of plummer blocks hold the rear axle in place at the back. The engine is located just inboard of the axle and drives via a spur gear with a ratio of around 4:1 to 5:1.

Drive is via a simple centrifugal clutch which is set to engage when the throttle is opened but will tick over without throwing out its twin shoes to make contact on a bell-housing surrounding it. Integral with this is a medium weight flywheel, which is knurled to enable operation of an electric starter. (This starter is similar to those used to start model aero engines but with a hard rubbing ring instead of the spinner engaging disc).

Wheels are made up of plain hubs, usually of plastic, but for the more exotic of alloy, plus rubber or neoprene tyres of varying degrees of hardness which must be glued on to them. This is most important! Adhering these tyres is a sticky job with Evo-Stik or similar contact glue, after which they should be cleaned up and balanced. Again, the lazy operator can buy wheels and tyres "t and g" as the lists put it or "trued and glued".

Steering follows full-size practice to some degree with Ackermann steering embodied to enable the car to take its bends without slip. According to the price of the equipment bought this will vary from the very simple but adequate to the more elaborate linkage with ball and socket ends for varying toe-in and other adjustments dear to the car driver. But one and all will contain a useful device called a "servo saver". This is an over-ride device to protect the hard-worked radio servo from burning out when trying to turn round an immovable object or the like.

The set-up for a 1/12th scale electric car follows much the same pattern but in a smaller size. Drive is direct from the motor via a spur gear and no clutch is needed here, since the motor can be operated fully from off to full speed, with the motor acting as a brake when slowed down. The majority of electric cars have one significant difference. They also have a reverse gear! This can be very handy in backing a car away from an obstacle, and certainly saves a lot of marshalling duties during a race.

For the simpler type of i.c. (internal combustion) car a band brake system is employed; the more expensive outfits embody disc brakes — yes, disc brakes. Coming even more into the full-size picture, the latest development is to install a working limited slip differential. There is even some talk of gears.

Just to keep the picture of miniature car against full-size, we must mention that there is also stock car racing in $\frac{1}{8}$th scale. This has proved a very much appreciated variant on the theme for more lighthearted operation. Cars here are robustly built like full-size stox with a welded frame chassis, nerf bars and over-ride bumpers fore and aft. Drive is by belt rather than gears; no brakes are fitted. A standard car is maintained by a price limitation on both car and engine employed. Skills are determined by race successes and the novice starts with a "white top" car progressing through to red — or for the national champion a gold top. Stock car racing requires a smaller area to race on, less expense in maintaining the car, and a somewhat more carefree approach to the hobby.

Radio equipment

We have our car built and ready mechanically. There remains the question of its control. Simple two-channel radio control equipment is all that is required. If you have multi-channel gear already then just use two channels only. A variety of manufacturers can provide suitable sets, Futaba is still the main supplier in this field, but the choice is widened to include MacGregor, Digiace, Sanwa, Skyleader, MRC, Talisman, indeed any of the leading makes. Desirable is that servos should be strong, powerful, swift to respond to signals.

The two servos, preferably waterproof if used for outdoor racing, are installed, one to operate steering and the other to do the double job of throttle and brake. This is achieved by a toggle linkage, so that forward on the control stick gives throttle, backward the brake, with a neutral in between period. Futaba are alone in providing a special set with a "steering wheel" control instead of a stick. This is not very popular in this country, most drivers still use a stick, but it is the usual thing in the U.S.A. Some drivers also fit a trigger speed control like those used for slot car racing — indeed it is the same trigger suitably modified.

With an electric car the same radio equipment is used. However, the more sophisticated driver can fit a proportional



Above — **AMPS differential.**

Right — **Model Air Port team from Bristol.**

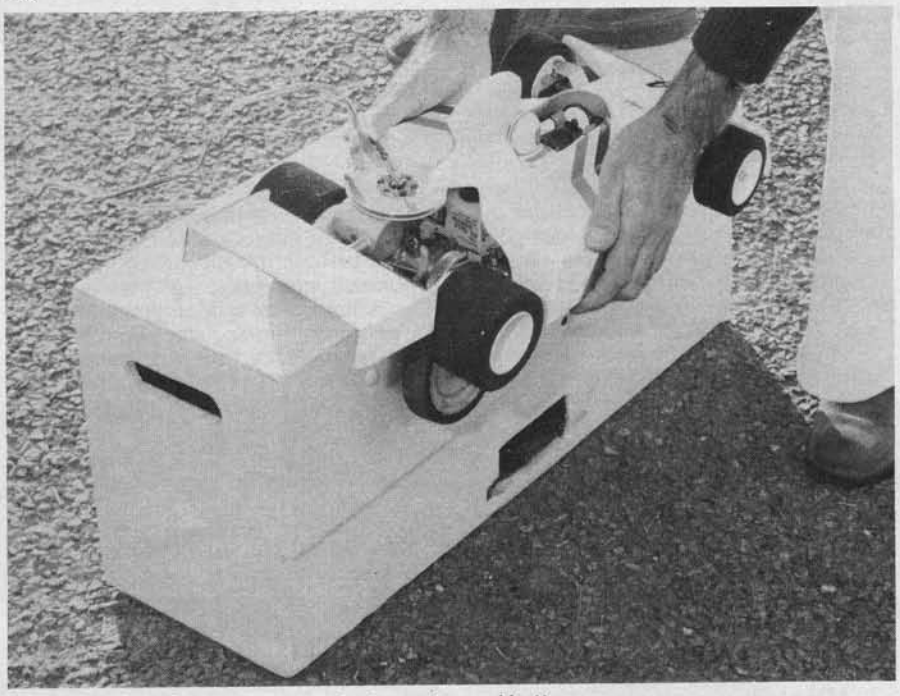

Starter in a box. Parts are car ex-starter motor and battery.

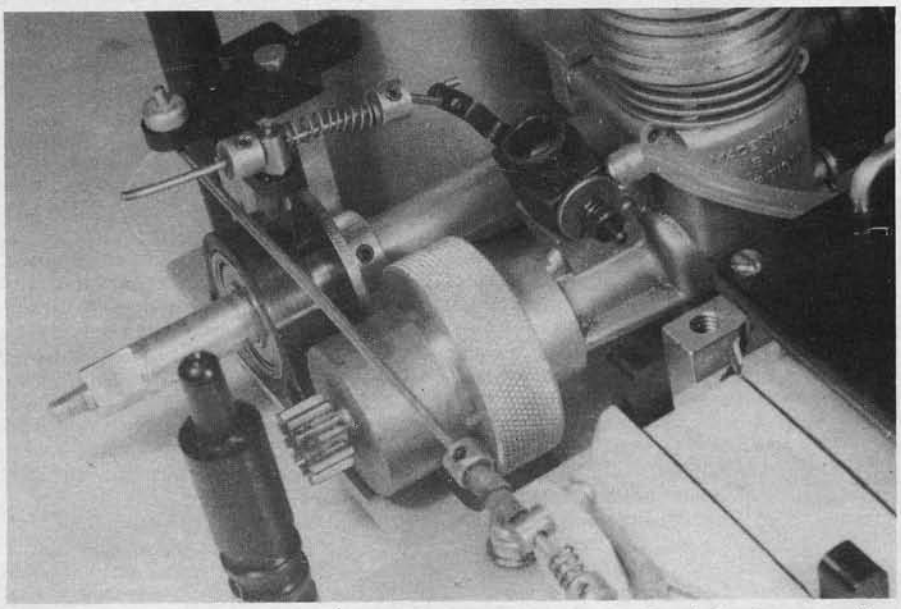

PB car showing disc brake/throttle connection.

Dutch Stock car meeting.

speed control in place of a rheostat type of speed regulator which is the standard accessory. This will enable him to discard one servo and set the price off against the more expensive proportional control. A battery for the receiver can also be discarded by cutting into the 7.2 volt nicad 6-cells at a suitable point, or a voltage cut-out can be fitted. All these are interesting variants for the electronically-minded.

Just as with boats or aircraft a number of cars can be run simultaneously without radio interference by using the allotted six main frequencies. A further six, making twelve in all, can be run by split frequencies where the circuit is not too large taking cars to the limit of their radio range. There have been occasions where, in Switzerland for example, the Post Office has granted permission for a temporary extension of waveband and as many as fifteen cars have raced together on a big occasion. Certainly in England this seldom goes much above nine or ten cars running together in such events as team races over a three or four hour race, or for the practice laps beforehand. Alas, there is sometimes a degree of interference which requires a regular monitoring at meetings.

Making a start

If you are sufficiently enthused to make a start here are the basic items you will need. First: a kit of parts to make your first car. You *can* make a scratch built-car, but for a first effort settle on a kit. British kits are well to the fore. Mardave is the cheapest at £23.50 or you can go straight away to the top level with a PB International which will cost you £75. Both provide the same items but the more sophisticated nature of the PB will enable you to go faster sooner. On the other hand, if your needs are modest, possession of the lower-priced kit will enable you to take part in limited-cost racing events where no one will have more elaborate a car than yours.

Then you will need a bodyshell for the car. These are offered in a wide variety of shapes for all the popular racing cars and need only to be trimmed to shape and painted. Price again varies, but be modest at first and buy a cheap ABS body which is tough and will take your first spills.

Your motor choice is limited to the 3.5 cc engines, starting with either a Veco 19 or 21, a HB21, an Irvine, or going up in

Inside of starter box.

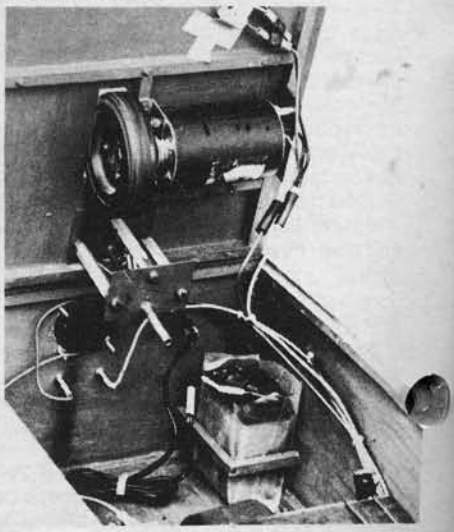

performance, a SuperTigre X21, an OPS or a K&B. They will require a heatsink to keep the engine cool (HB, Irvine and SuperTigre include heatsink in price) plus a suitable silencer. Racing rules demand a maximum noise output of 80dB at 10 metres so this is an essential. To keep your engine in good trim you should fit a fuel filter between fuel tank and carburettor and, equally important, an air filter over the carb intake. You will be racing in possibly dirty conditions and half an hour's filterless running could mean expensive replacements.

Some kits include a fuel tank, which may be exactly what you want or you may wish to have something better. They come in plastic, nylon and metal, some with sumps, some without. In the same way simple running can be improved by pressurised fuel tanks via the silencer pot . . . but this is for the more advanced.

Radio needs have already been mentioned — but do not forget the licence, five years for just over £2 and no test required.

If you are going electric needs are somewhat simpler, just a car kit plus a 12 volt battery to make quick nicad recharges, and again the radio equipment. Electric kits run from £37.50 upwards. Do not necessarily feel you must have the dearest . . . some of the leading events have been won with "out of the box" moderately priced cars.

If you are already modelling in one way or another you should be reasonably equipped for all the tools you are likely to need to make your model. Items, some already mentioned, that are extra will include the electric starter. Even this you can make yourself from a full-size car ex-starter motor from a breaker's yard, plus the inevitable 12 volt battery. You can fill your fuel tank from the can, but it is as well to have a bulb type fuel filler which just squirts it in. Then the usual field gear of screwdrivers, pliers, spanners, nuts, bolts, wire, tape, even string and spare glow plugs, spare wheels and tyres to change from medium to soft or vice versa if track or weather conditions require it. Again all this, but simpler for electric racing.

Where to go racing

The BRCA has circuits in many parts of the country, and their area representative will tell you the nearest. Clubs are springing up every month and apart from the "purpose built circuit" there are very many occasional use tracks operating on car parks in industrial estates or where the noise of engines will not upset residents. If there is no local club that your model shop can recommend then start your own club with a notice in the local newspaper to get interested people together, and a quiet canvass of local MP, councillors, police, schools . . . it is easier than you think.

Where to join up

British Radio Car Association

Secretary: Tom Martin, 7 The Green, Werrington, Peterborough, PE4 6RT.

Radio Stock Car Association

Chairman: Dave Wragg, 1 Bignal Drive, Leicester Forest East, Leicester.



Typical clutch/gear/flywheel.

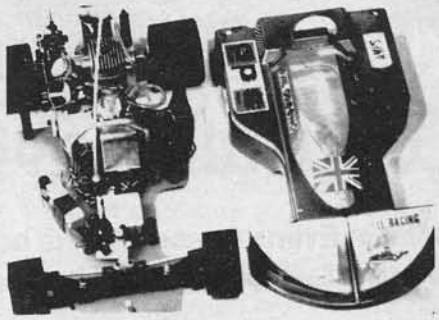

Phil Greeno's 'breathed on' World Cup winning PB.

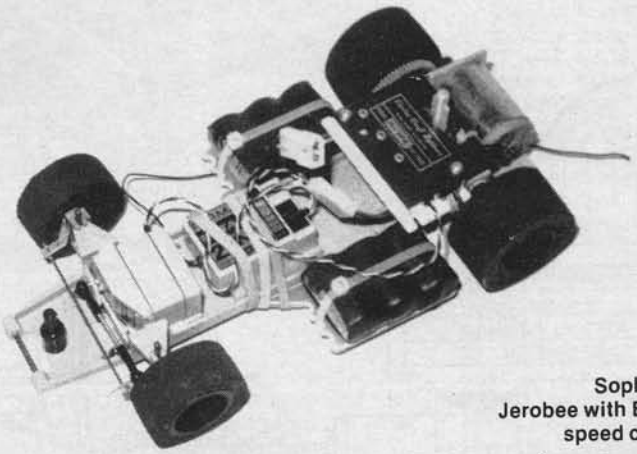

Sophisticated electric — the Jerobee with Electrocraft proportional speed control and Futaba radio.

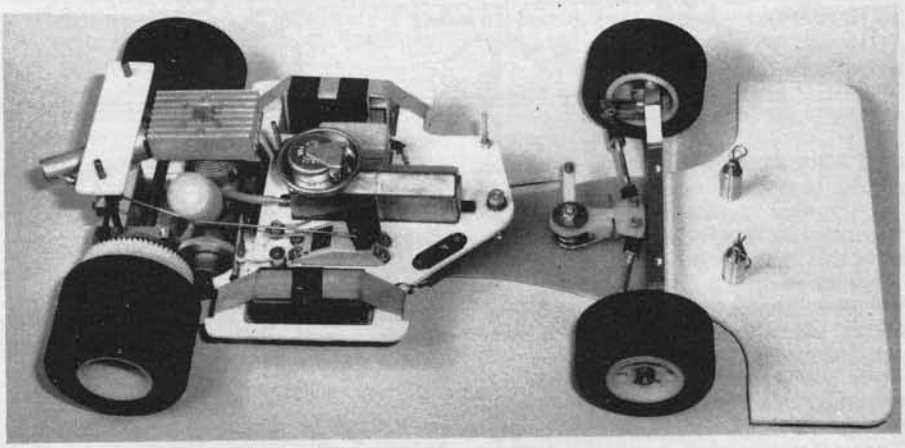

Best in the USA — Associated latest model RC200. Note servo saver.

Assorted R/C goodies from Ted Longshaw's showroom.

The Development of the Railway Steam Locomotive

Martin Evans describes the background behind the famous locomotives, some of which may still be seen today.

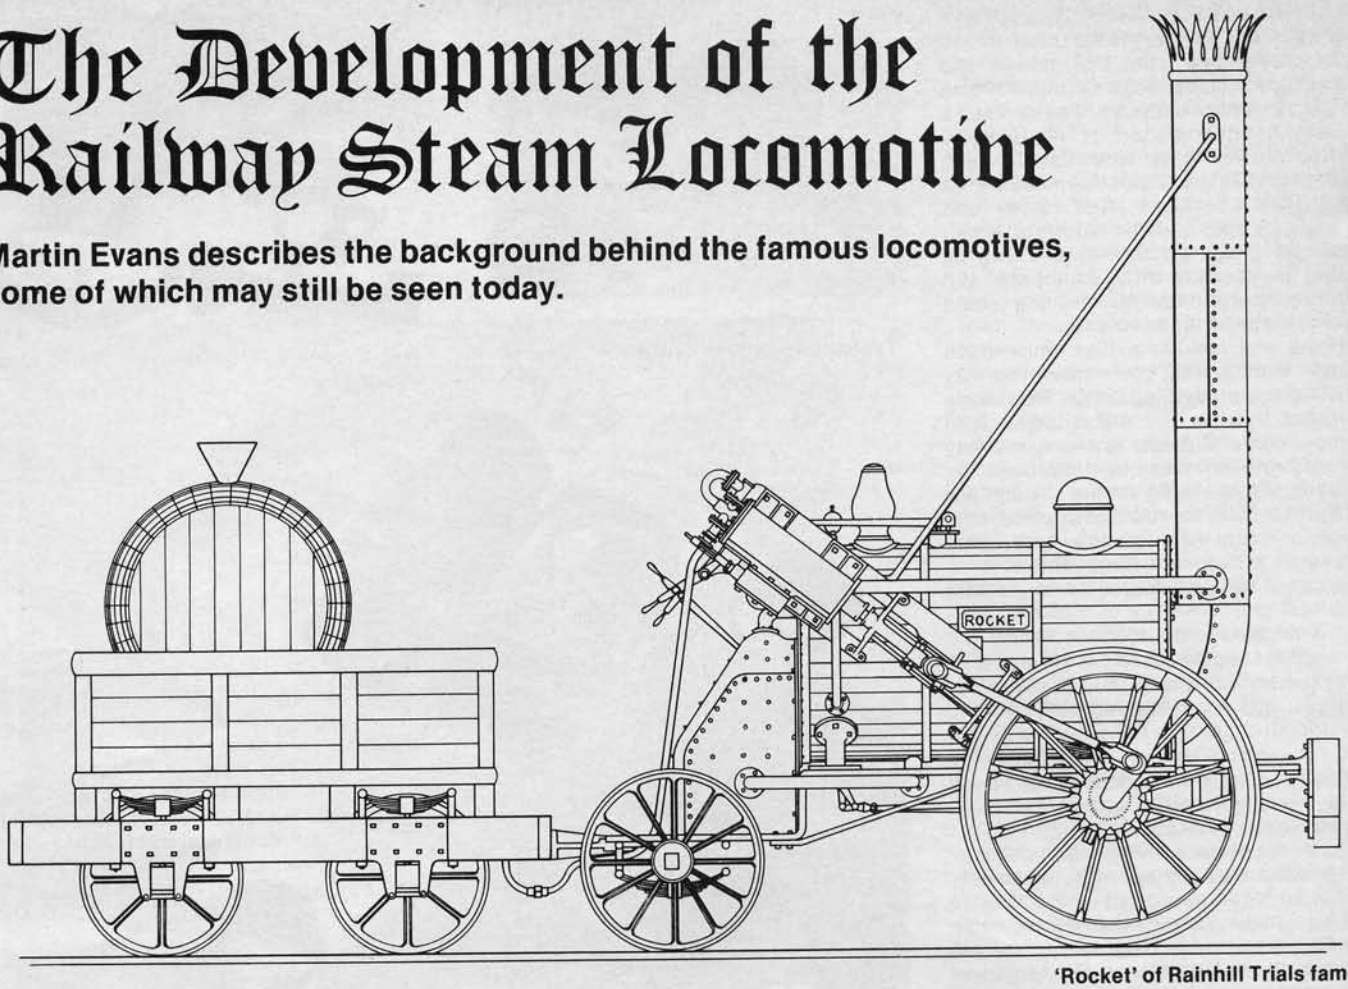

'Rocket' of Rainhill Trials fame

VERY FEW PEOPLE nowadays make the mistake of thinking that George Stephenson "invented" the steam railway locomotive. In actual fact, no one person could claim this honour. But perhaps Richard Trevithick came nearer to it than most. His *Penydaren* engine of 1804 was certainly the first steam locomotive to run on rails and to haul a reasonable load.

The *Penydaren* engine utilised a horizontal boiler having a single flue, leading to a tall vertical chimney. A single horizontal cylinder drove on to a short transverse crankshaft, and this sported an enormous flywheel and a gearwheel which drove all four wheels through intermediate gears. The wheels were flangeless, as the primitive rail then in use was itself flanged. In 1808, Trevithick took a locomotive to London, setting up a circular track near Euston Square, where he demonstrated the power of steam to unbelieving spectators. It is said that the engine, which Trevithick named *Catch Me Who Can,* reached a speed of 12 m.p.h.

Three years later, Blenkinsop and Matthew Murray built a locomotive somewhat similar to Trevithick's but employing a racked drive, in which geared wheels engaged pegs fitted in the line, so that slipping was impossible, short of something breaking. George Stephenson, however, believed that given adequate adhesive weight, a smooth flanged wheel, working on an unflanged iron rail, would prove successful and in his *Blucher* of 1814, he achieved the feat of hauling a train weighing approximately 30 tons at about 4 m.p.h. Unfortunately, *Blucher* had insufficient boiler power for continuous working.

Some controversy raged over who was the first to use a proper blast pipe in the steam locomotive. It was established that Trevithick, in his *Penydaren* engine, arranged for the steam to be ejected up the chimney, but the exhaust pipe had no contracting orifice, and it is not by any means certain that the pipe was set centrally in the chimney.

Hedley, when building his *Puffing Billy* and *Wylam Dilly* arranged for the exhaust steam from the two cylinders to be combined into one pipe which passed into the chimney. Perhaps the first of the early steam engineers to fully realise the importance of a proper blast pipe was Timothy Hackworth with his *Royal George* of 1827.

Meanwhile, the Stockton & Darlington Railway was opening, and in September

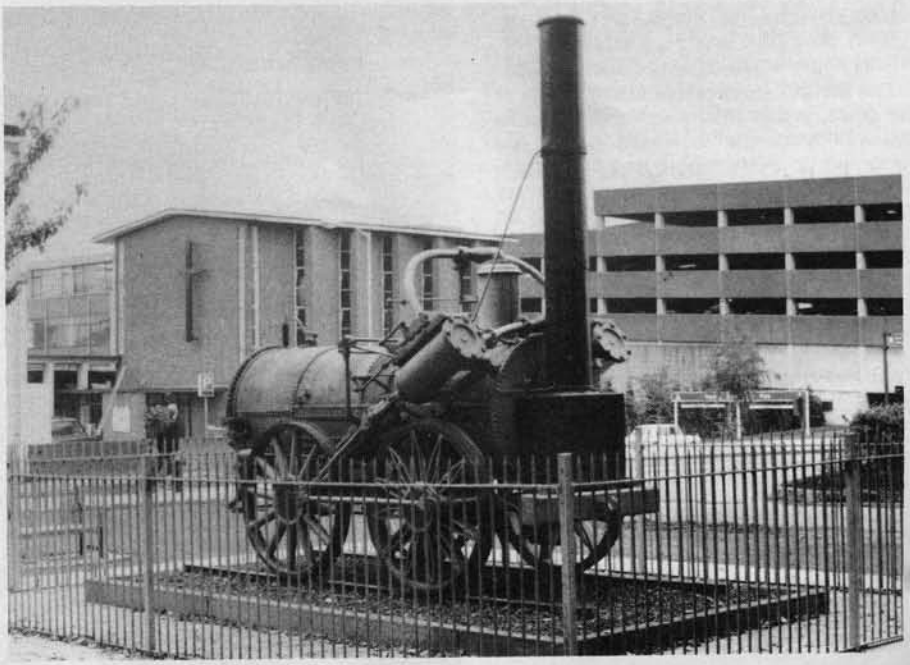

The 'Invicta' was built in 1830 by Robert Stephenson for the Canterbury & Whitstable Railway. *Photographed by D. A. Whitbread.*

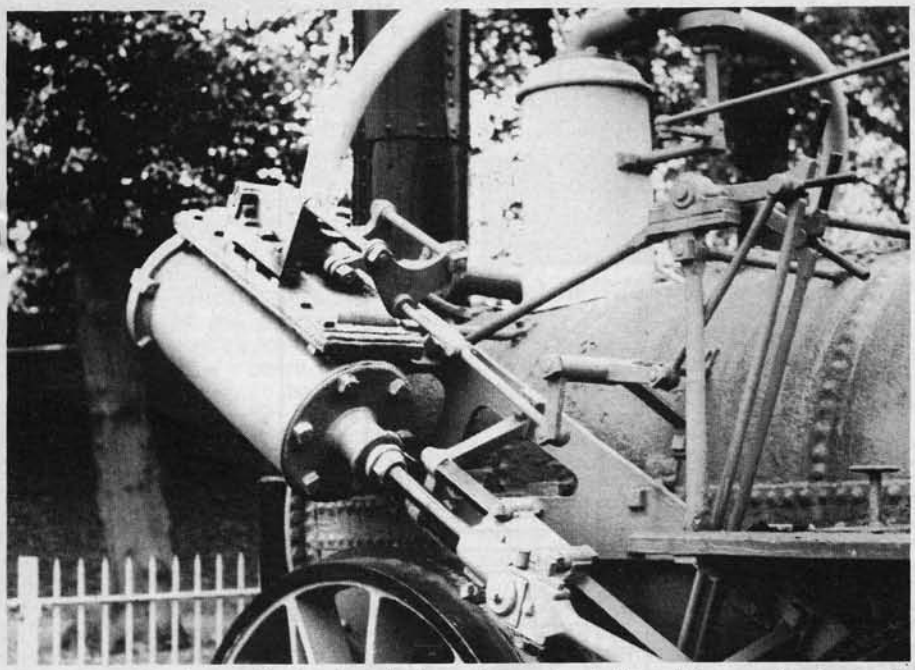

Mr Whitbread's photo of Invicta's cylinder and crosshead. The old locomotive is now in the National Railway Museum, York, for renovation.

1825, Robert Stephenson's famous *Locomotion* entered service, though not without several teething troubles. *Locomotion* was a very different design to the earlier engines. Her wrought-iron boiler, 10 ft. 4 in. long x 4 ft. diameter, had a single flue 2 ft. diameter; at the front end, the flue was continued upwards as a chimney. There were two vertical cylinders, 9½ in. x 24 in., the lower parts of which were placed inside the boiler barrel. Each cylinder was placed vertically above the centre of a driving axle, its connecting rods being attached to the wheels. The piston rods drove through the tops of the cylinders, and the two crossheads, which were guided by half-beam parallel motions, extended across the top of the boiler to form connections to four long connecting rods, two on each side of the locomotive.

A single eccentric was used for both forward and backward gear. The main eccentric rod was carried upwards to operate the valve of the front cylinder, while a second eccentric rod from the same eccentric worked horizontally on to a bell-crank to drive the valve of the rear cylinder. Connected to the valve spindles were two handles, by means of which the driver could disengage the eccentric rods from the valve levers, and move the latter by hand to start or reverse the engine.

The wheels of *Locomotion* were 4 ft. diameter and the axles worked in plain cast-iron plummer blocks; there was no springing. An interesting point was the arrangements of cranks and coupling rods. The cranks of each pair of wheels being worked from one cylinder were parallel to one another, but were placed at 90 deg. with those of the other pair of wheels, the front cranks leading. Direct outside coupling rods were used, the pins for the rear ends being in return cranks. The coupling rod pins were spherical to allow flexibility.

The boiler was probably designed for a working pressure of 50 p.s.i., and the weight empty was about 6¾ tons, or in working order about 8½ tons. The tender, on four wheels, had wooden frames, with a sheet iron water tank.

The original boiler of *Locomotion* exploded in July 1828, after which Timothy Hackworth rebuilt the engine with a new boiler having a single large flue and two return flues; later, a third boiler was fitted with a single large flue. The engine finished its regular service career in 1841.

Three other engines of the *Locomotion* type were built by Stephensons for the S&D — *Hope*, *Black Diamond* and *Diligence*, between November 1825 and May 1826. A fifth locomotive was built for the S&D by Robert Wilson of Gateshead; this engine had four cylinders, but it proved a complete failure and never entered service, its boiler being used for Hackworth's *Royal George* of 1827.

Improvements by Robert Stephenson

On his return from a visit to South America in 1828, Robert Stephenson set about improving the locomotives being built at his Newcastle works. In his *Lancashire Witch*, he used two cylinders outside the boiler inclined at an angle of about 39 deg. Crossheads and guide bars were used. The four coupled wheels, all on laminated springs, were 4 ft. diameter, with wood spokes and iron tyres. The cylinders were 9 in. x 24 in. The exhaust passed through pipes into the chimney, and originally, additional forced draught was applied by bellows placed under the tender and worked by eccentrics; but this was later found to be unnecessary.

A very similar locomotive, *America*, was supplied by Stephensons in 1828 to the Delaware & Hudson Canal Co. in U.S.A.

Locomotive No. 7 on the Stockton & Darlington was named *Rocket*, but should not be confused with the more famous and later *Rocket* of the Rainhill Trials. No. 7 was a six-coupled engine. It resembled the *Lancashire Witch* in many details but

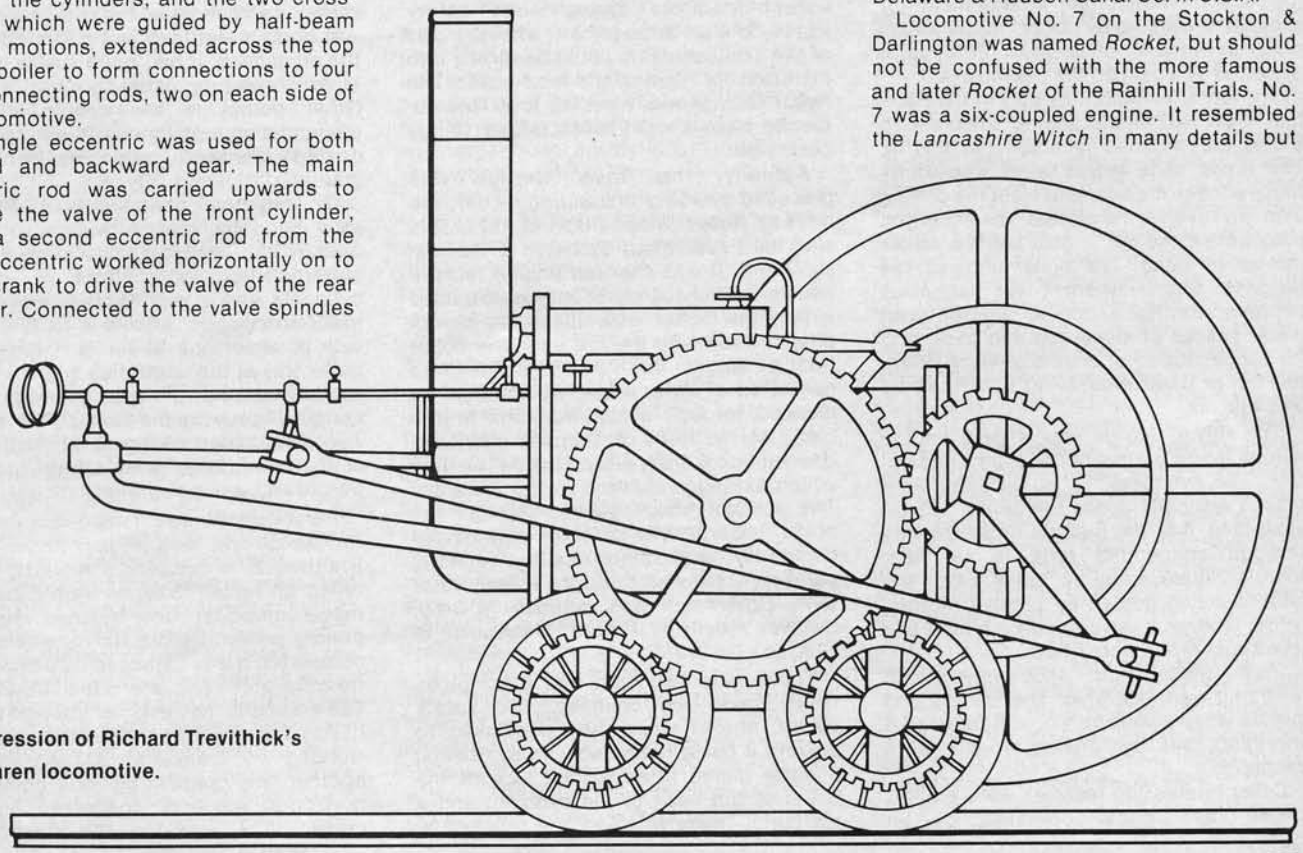

An impression of Richard Trevithick's Penydaren locomotive.

A 'Planet' type locomotive of 1834 built by Robert Stephenson & Co.

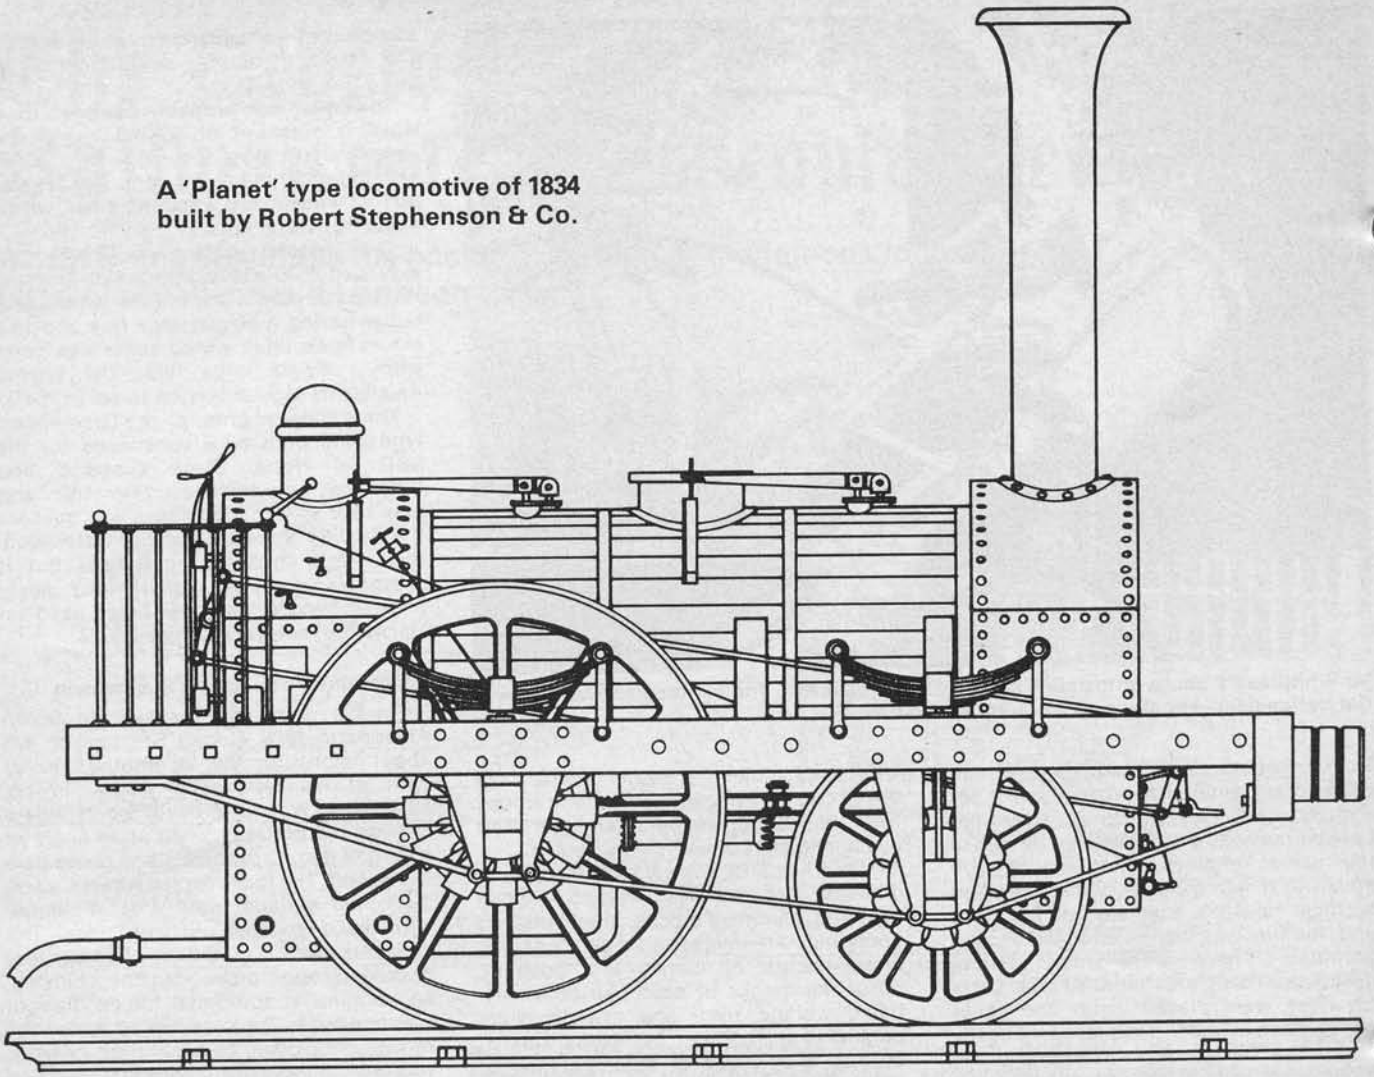

had a somewhat crude arrangement for expansive working by cut-off in the steam pipe, by means of a mushroom valve operated by a cam on the trailing axle.

The *Rocket* which took part in the Rainhill Trials had single driving wheels 4 ft. 8½ in. dia., inclined cylinders 8 in. x 17 in. The brass slide valves were worked by loose eccentrics actuated from the driving axle. To reverse the engine, the eccentric rods were lifted out of gear and the valves moved by hand. The boiler showed the biggest improvement over previous designs, having a copper firebox with water spaces at sides, top and back, and 25 copper tubes of 3 in. dia. were fitted, the boiler itself measuring 6 ft. long by 3 ft. 4 in. dia.

The *Royal George* was a 0-6-0 engine with a much bigger boiler than *Locomotion.* The cylinders, 11 in. x 20 in., were placed vertically above the boiler, one on each side, and the pistons drove directly through connecting rods to the rear wheels. There were no guide bars, the pistons being guided by parallel motion, which worked a valve shaft on which two loose eccentrics were fitted.

From these, both slide valves and reversing were operated. The leading and middle wheels were fitted with laminated springing, but the driving wheels were unsprung.

Other interesting features were a short stroke feed pump operated by an eccentric, direct spring-loaded safety valves, and an arrangement whereby part of the exhaust steam could be turned into a cistern for heating the feed water. The *Royal George* was also the first locomotive to have a contracted orifice to the blast pipe.

Actually, the *Royal George* was preceded by a very interesting locomotive built by Robert Stephenson in 1827. This was the *Experiment,* Stockton & Darlington No. 6. It was the first engine to have two horizontal cylinders. They were placed within the boiler with the back covers almost flush with the fire end. The boiler had a single flue and the fire-grate consisted of water tubes, which could be cleaned through a cast-iron box at the back. At the front or chimney end, they opened into a drum placed inside the flue, which extended forward to the chimney. The exhaust steam passed through the boiler towards the chimney but before being discharged into the atmosphere, part of it passed through a feed-water tank. *Experiment* was originally a 0-4-0, but was rebuilt by Timothy Hackworth in 1830 as a 0-6-0.

There were two cast iron blast pipes fixed inside the chimney; two safety valves, one of which was padlocked to prevent it being tampered with by drivers, a water gauge fitted to one side of the boiler at the back of the cylinder, and a mercurial gauge fitted to one side of the chimney and nearly of the same height.

A brass water feed pump was driven by the crosshead; it had mitre valves, the lift of which was regulated by spiral springs. Other points in the design included laminated springs for all wheels, spherical driving crankpins and cast-iron axle-guards.

Of the other contestants at Rainhill, little need be said. Although very well built, Timothy Hackworth's *Sanspareil* suffered from the effect of vertical cylinders and a very short wheelbase. It had four-coupled wheels 4 ft. 6 in. dia., with a wheelbase about 5 ft. 3 in. The boiler was of the return flue type and there was no framing, the axle bearings being bolted directly to the boiler. The engine was disqualified owing to non-fulfilment of the conditions, being somewhat overweight and lacking springs.

Perseverance was damaged on its way to Rainhill and took no part in the Trials. Braithwaite & Ericsson's *Novelty,* which relied on forced draught from a bellows, made some fast runs, but had very little pulling power. Before its runs had been completed it was damaged by a blow-back from the boiler and later a feed pipe broke. The engine is, however, of interest in that it was fitted with two vertical cylinders, working on cranks at 90 deg. to one another, the connecting rods being in a horizontal position, connected by bell-cranks.

Later engines of Rocket type

With the success of the multi-tubular boiler, further engines similar to the *Rocket* were built in 1830. The first four engines of the *Meteor* class had the inclination of the cylinders much reduced, and the boiler tubes were reduced in diameter to 2 in., with their number increased to 88 or 92. The final form of this design was seen in the *Northumbrian* which was completed in August 1830. This engine had a boiler with 132 tubes of $1\frac{5}{8}$ in. diameter, but the most important improvement was the provision of an internal firebox. In this engine, we find the first example of the modern locomotive boiler. The *Northumbrian* had cylinders 11 in. x 16 in. and weighed 7 tons 7 cwt. Like the two *Phoenix* engines built just before, she had a proper smokebox.

In the years immediately following the Rainhill Trials, there were three schools of thought in locomotive design, headed by Hackworth, Bury and Robert Stephenson respectively. The first engine to have horizontal inside cylinders and a crank-axle was the *Liverpool* built by Bury and Kennedy. This locomotive had 6 ft. coupled wheels, then the largest in the country, and 12 in. x 18 in. cylinders inclined slightly upwards to allow the piston rods to clear the leading axle. Shortly after completion, the engine was fitted with a multi-tubular boiler having Bury's D-shaped firebox with hemispherical top and casing. *Liverpool* showed a considerable advance in locomotive design.

Bury's *Liverpool* and Stephenson's *Planet* (also of 1830) were the first engines to have a true framing. The *Planet* combined horizontal cylinders encased within the smokebox, crank-axle, multi-tubular boiler with firebox inside and a frame which supported the boiler.

For goods traffic, Stephenson modified the *Planet* of 1830 by making the wheels of equal diameter and coupling them together. Engines of this type such as the *Samson* and *Goliath* with 14 in. x 16 in. cylinders proved very successful. An interesting feature of the *Planet* type engines was the valve arrangement. Two slide valves were used on the port face, connected by a single valve spindle, the idea being to shorten the steam passages from the ports to the cylinders. It was found, however, that this design increased the wear in the valve gear and it was accordingly abandoned.

An interesting development occurred in 1832, when a 2-2-0 engine built by Rothwell, Hick & Rothwell of Bolton, and named *Pioneer*, was fitted with a variable blast pipe, which had an inverted cone in the orifice. The amount of opening could be controlled by the driver. No doubt the device was somewhat primitive; nevertheless it showed that even in those early days, engineers were beginning to understand the importance of draughting.

Boiler construction varied a great deal at this period. The copper tubes generally used were found to wear out quickly, through the effect of hard particles in the last, and were dropped in favour of brass tubes, which were usually fitted with steel ferrules at both ends. Firebox side stays were generally of copper, around ¾ in. dia., and threaded full length, being riveted over on the ends. Feed pumps with ball valves in the non-return valves were introduced in 1834; the pumps were either driven by eccentrics or from the crossheads.

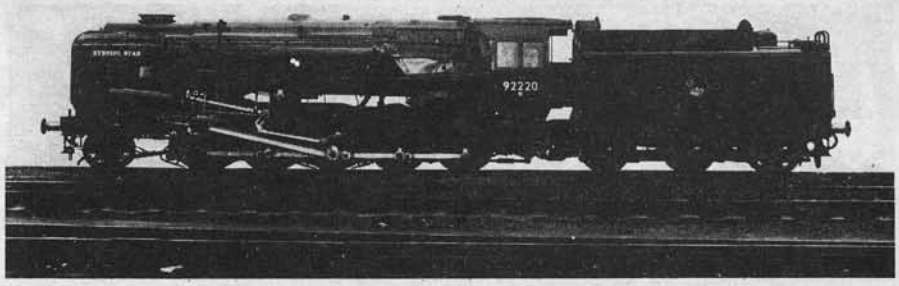

Last of the many. 'Evening Star', last steam loco made for B.R. *Photo by courtesy of the Oxford Publishing Co.*

The locomotive bogie, or four wheel truck, was originally patented by William Chapman in 1812. At first, no side play was allowed, the truck pivoting on a central pin. Bogie locomotives were exported to U.S.A. by Stephensons and Tayleur & Co. in 1833.

George Forrester of Liverpool was the first to use horizontal cylinders outside the frames. Three locomotives with this arrangement were built for the Dublin & Kingstown Railway and one for the Liverpool & Manchester in 1834, and later further similar engines for the London & Greenwich. Outside plate frames and bearings were used. The valve gear of Forrester's engines were also the first to use four fixed eccentrics.

Broad-gauge engines

The first engines delivered to the Great Western Railway, which was opened to traffic in 1838, were a very mixed lot, mainly quite unsuitable; more than one was originally supplied with driving wheels no less than 10 ft. dia.! The only successful early G.W.R. engines were the *North Star* and *Morning Star,* built by Stephensons. The former was really built for the New Orleans Railway, U.S.A., but was altered to suit the 7 ft. gauge "Brunel" line. *North Star* had 7 ft. driving wheels and a boiler measuring 8 ft. 6 in. by 4 ft. dia., and the 2-2-2 wheel arrangement. The engine was very successful. It was rebuilt with larger boiler and cylinders in 1854 and then worked until 1870.

When Daniel Gooch took over the locomotive department, he based his first designs on the *North Star* but enlarged most of the dimensions; he was the first locomotive engineer to attempt some form of standardisation. The peculiar type of sandwich frames originated by Stephenson was adopted by Gooch and used right up to 1865. At first, ash was used, between the iron flitch plates, but this gave way to oak and eventually to teak, as it was found that acid in the first two types of wood tended to cause corrosion. The use of sandwich frames on the G.W.R. was probably due to the hardness of the 7 ft. road, as they were allowed a certain amount of give not possible with thick iron or steel frames. For the same reason, the G.W. tended to use longer springs than other companies.

Gooch's broad-gauge engines of the 1846-50 period were well ahead of those of other lines. His *Iron Duke* type, of which 22 were built at Swindon in 1847-51, were quite large 4-2-2's with 8 ft. dia. driving wheels. The cylinders were 18 in. x 24 in., the working pressure originally 100, later increased to 120 p.s.i. The boilers had no less than 1767—1790 sq. ft. of heating surface, with a grate area of 21.6 sq. ft.

Mention should also be made of the "long-boiler" type of locomotive, introduced by Stephensons in 1841. The idea behind this was to obtain greater boiler power while at the same time obtaining a low centre of gravity, which was thought essential at the time. Some 2-4-0 goods and mixed traffic engines were also built with the long boiler. In some cases, the firebox was arranged behind the axle of the single pair of driving wheels, allowing the outside cylinders to be placed well back.

The long boiler passenger engines were not a great success; although the boilers were certainly more efficient thermally, the engines proved unsteady while the long barrel necessitated short fireboxes and restricted grate areas. On the Eastern Counties Railway, better balancing, introduced by Fernihough, improved the long boiler engines. The type was well received in France, and many more were in service there up to about 1873.

One of the most important improvements in locomotive design occurred with the introduction of the link valve gear, now known as the Stephenson link gear. Using two fixed eccentrics on the driving axle, with a link having a curved slot, this gear was first used on one of Stephenson's long boiler goods engines in 1842. Although always called the "Stephenson" gear, it was really due to two employees of the Company, Messrs. Williams and Howe. Isaac Dodds' "wedge" motion was patented in 1839 and applied to engines on the North Midland Railway in 1842. At first, Dodds used the wedge eccentric for reversing only, a second eccentric with expansion valve being added. Later modifications enabled the wedge motion to be used also as an expansion gear and a single eccentric was employed provided with a double wedge. When the wedge was moved by levers along a square section of the axle, it acted upon corresponding inclines inside the eccentric sheave, so that the latter was moved transversely across the axle. The gear as improved by Henry Dubs was fitted to a number of engines built by the Vulcan Foundry in 1852-5. The gear was simple but had the defect that the wedges sometimes seized and rendered the gear immovable.

The Gooch stationary link motion appeared in 1843 and was used on the G.W.R. broad gauge engines for many years; it was also adopted by John V. Gooch on the L.S.W.R., by R. Sinclair on the Great Eastern for a short time, and on a few Caledonian engines in 1875.

To be continued.

Modelling at your 'Leisure'...

Bring and operate your own models on a ONE WEEK HOLIDAY for the family

MAY 5th to 11th 1979
Including 7th May Bank Holiday

Features include:
*** Scale Boats * Electric and Steam * Power Boats * Electric and Power, 3½cc Maximum * Slope Soaring * R/C Sport Power * Electric and I.C. R/C Cars * Live Steam Models * War Games * Film Shows * Talks * Expert Instruction * Trade Stands & Competitions * Excursions * SWOP SHOP**

All at PRIMROSE VALLEY — YORKSHIRE's leading Self-catering entertainment centre right next to miles and miles of sandy beach organised in conjunction with MODEL & ALLIED PUBLICATIONS LTD.

IT'S ALL THERE AT PRIMROSE VALLEY

* Miles and miles of glorious sandy beach!
* Bands! * Cabarets!
* Variety and children's shows!
* Choice of Bars! * Shopping parade!
* Restaurant! * Fish 'n' Chips!
* Roller and speed skating! * Skateboard rink!
* Adventure playground!
* Indoor heated swimming pool! * Disco!

Stay in our superb 3 bedroom chalets, complete with TV, or our famous caravans with all mains services.

Now that's what we call entertainment!

Primrose Valley specially selected by M.A.P. for its first rate facilities for modellers

* Fine 2½ acre boating lake
* Radio Control Aircraft power and Soaring Sites
* Model Car Circuits (Electric and I/C)
* War Gamers Headquarters
* Modellers Cinema
* Model Makers workshop
* Live steam track

All conveniently situated within Primrose Valley

At nearby Reighton Sands (2 miles away) is the magnificent cliff site for slope soaring enthusiasts and R/C powered aeroplane modellers.

LUXURY CHALETS

* £44 exclusive VAT
* Sleep up to six people
* 3 separate bedrooms
* Lounge, bathroom, kitchen
* T.V. & Fridge

SUPER LUXURY CARAVANS

* 6-Berth with showers
* £41 exclusive VAT for up to six people
* Minimum length 28 ft.
* Free hot water, T.V., Fridge, electricity for lighting
* Internal flush W.C.

MAIN SERVICE CARAVANS

* £38 exclusive VAT
* All are 6 berth and at least 25 ft. long
* Services include T.V., Fridge, electricity for lighting, etc.
* Cold water, internal flush W.C.

For full details and Reservation Form fill in the coupon and send to Primrose Valley Holiday Estate, Filey, Yorks. or phone: Scarborough (0723) 512297 or (0442) 51244.

Please send me details of your MAP Hobby Holiday for the family

Name.....

Address.....

Club Report

Those of you who read *Model Engineer* will be already familiar with our Club Chat pages. They are written using information sent to the magazine by club secretaries or from personal visits, etc. Although there are individualists in model engineering as with all walks of life it is fair comment to say that the model engineering societies are the hub of the hobby's activities.

Take any form of modelling activity — a locomotive needs a track, a boat needs water, an aeroplane a flying field. These of course are functional models — not the static ones built for display only. Few of us have the resources of a track in the back garden, or permission to use private water or fields. A club can usually provide all three and the negotiating strength of a responsible body. Many a model maker is today enjoying the fruits of his labours as a result of his club's influence.

It is only natural that in a model engineering society the bias of models is towards steam power and of this a very high proportion is devoted to locomotives and traction engines. True, even among the loco enthusiasts there are those that prefer the diesel-electric power or straightforward petrol-engine propulsion. This only adds to the versatility of the individual. But the larger clubs also have sections for the boating enthusiast, racing cars, flying model aircraft — even small gauge railways. And because of the space available, far more ambitious projects may be undertaken than if the builders were to depend on their own resources.

But apart from the facilities a club may offer, perhaps the greatest benefit comes from the social life. Most clubs hold regular meetings — some in schools, some have their own clubhouse, some even prefer the atmosphere and added incentives of the 'local'. And when the weather permits — and even when it is anti-social — the members congregate at whatever venue they choose to operate their models. Often the land used by the club is granted by the local council and certain conditions have to be met. Mostly these amount to a minimum number of days during which the general public are admitted and entertained for a small fee. As the club funds benefit from this urgently needed wealth, there are seldom complaints about this. In any case it is human nature to want our models, built with loving care over a period of, perhaps, several years, to be admired by the uninitiated public.

In addition to these 'Open Days', clubs hold their own private meetings — often at night with the added attraction of a barbeque — and invitation days when other clubs are welcome to attend. Thus the circle of friendship within this wonderful hobby is extended to cover every part of the world where model engineering is practised. At Guildford Model Engineering Society's Stoke Park track last July visitors came from South Africa, Australia, Holland and many other countries just to be in on an international meeting. This particular event was the annual International Model Locomotive Efficiency Competition (IMLEC) which was followed a week later by Guildford's own Model Engineering Exhibition. The IMLEC event — 1978 was the tenth — requires that a locomotive is driven with a certain load for a given length of time, usually 30 minutes. A dynamometer car measures the loco's performance and the amount of coal used is considered in the final efficiency figure. The loco — and driver of course — having the highest efficiency, generally around two per cent, is the winner. Model and Allied Publications Limited sponsor this event and award the prizes. The 1979 event at Bristol will be held over two days for the first time ever and a good week-end is to be expected.

Start of something big — Canterbury Club's track.

Big gauge track at Castledare, Australia.

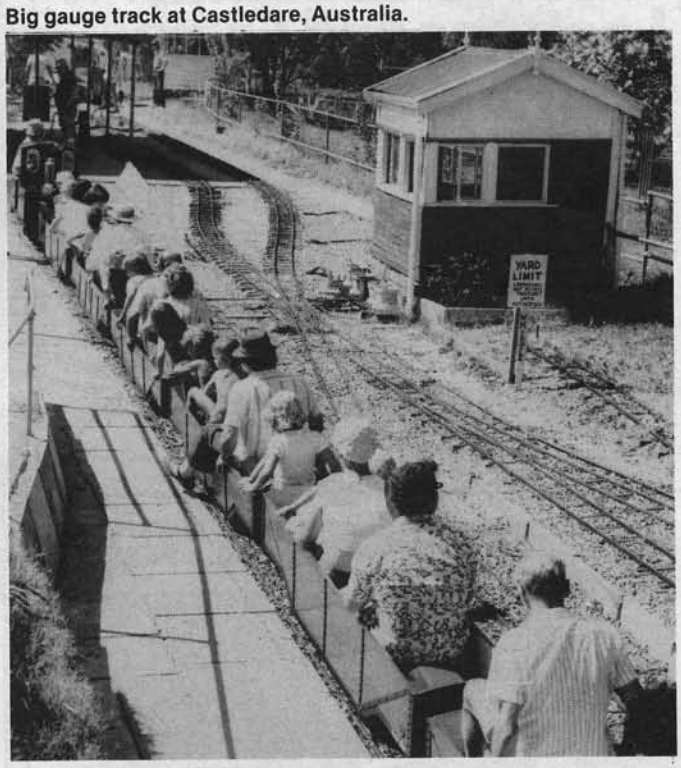

There is also the question of insurance. Wherever and whenever a model is operating in a public place there is a risk, however slight, of someone having a mishap, a model being damaged, or possibly stolen. Insurance against these risks costs little and if taken out through a club often costs even less. In the south, the Southern Federation of Model Engineering Societies has over 70 clubs in affiliation — and arranges insurance for a few pence a year. In the north there is the Northern Association of Model Engineers. Both these bodies arrange their own high class rallies and exhibitions.

In the past two years a new meaning has been put on club activities and the opportunity has arisen to enable all those interested in model making to meet with others in the more relaxing atmosphere of a holiday site. In 1977 and 1978, Pontin's in conjunction with Model and Allied Publications, held Festivals at Brean Sands and Southport, laying on all the facilities which each branch of the hobby requires. 1979 will offer the enthusiast yet more venues with Model and Allied Publications arranging a week's holiday for model makers at Primrose Valley, Filey, from 5 May. The site is self catering in chalet and caravan accommodation, but for the operation of all models, facilities are provided.

These, then, are the clubs. A place to go for comradeship, friendly chat on a winter's evening, or a hive of model activity when the season is right. And each month *Model Mechanics* will be carrying information about them, their meetings, visits, future engagements — the sort of information of interest to other club members or the individual who would like to sample club hospitality before he joins. All will be made welcome.

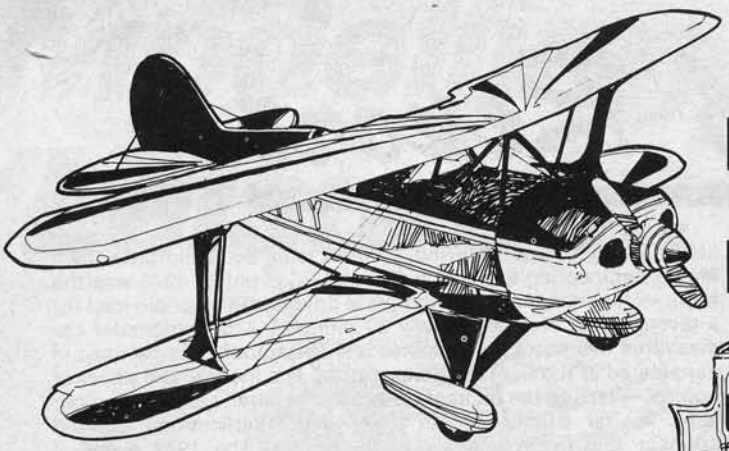

Live Steam Track
Model Boat Pool
Model Car Circuit

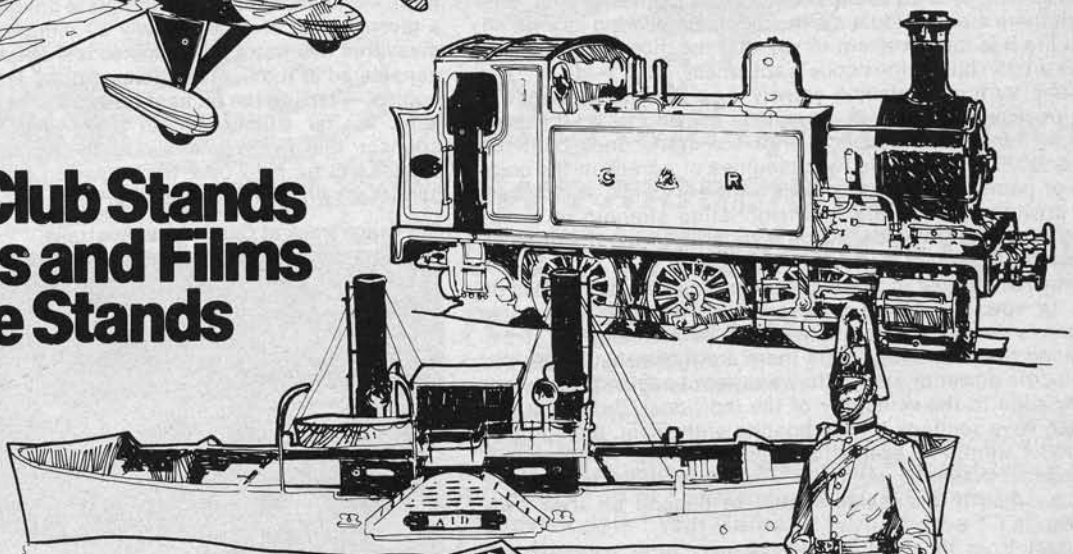

Model Club Stands
Lectures and Films
Trade Stands

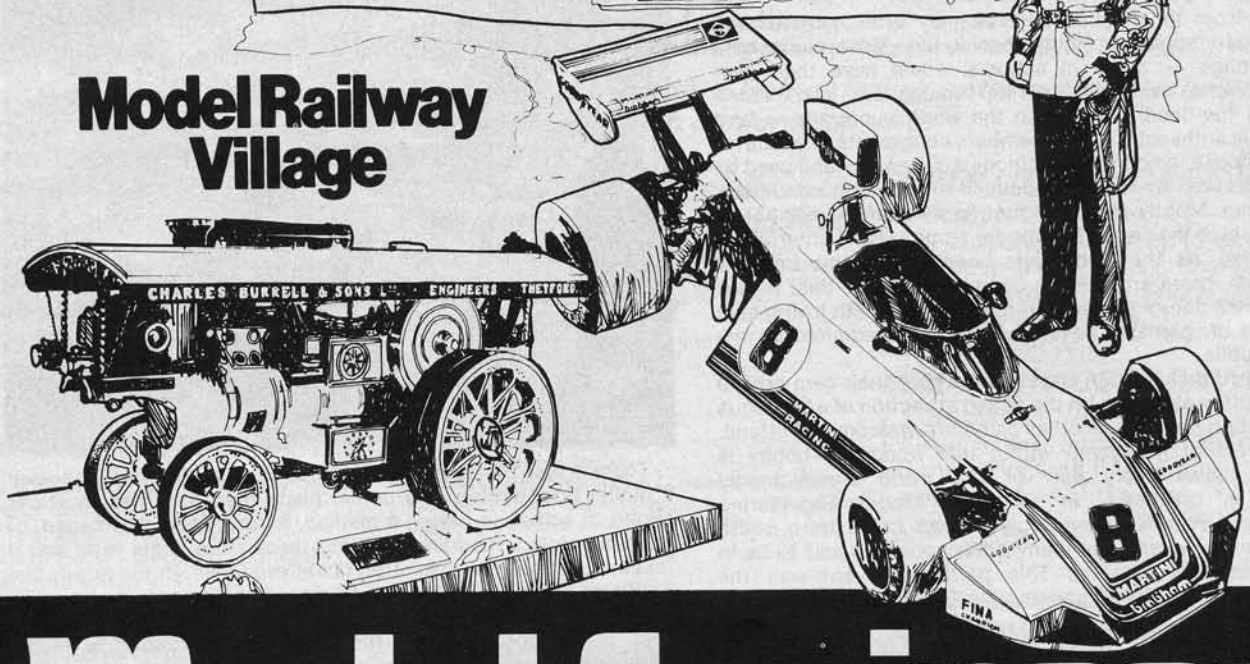

Model Railway Village

Model Engineer Exhibition

4-13 Jan '79
(Except Sunday 7th Jan.)

Wembley Conference Centre

ROAD & RAIL

330 Marsh Lane, Erdington,

Birmingham B23 6JD

Phone 021-382 3481

Hornby service, spares & repairs. Mainline, Lima, Airfix, Romford, Ratio, Peco, Hammant & Morgan Ks kits. Badger Airbrushes, Building kits, Brick Papers, Linka kits, Scenic materials. *Also,* LGB loco's, rolling stock & track.

Access & Barclaycard

Open every day except Sunday 9.30-6.30 p.m. Car park outside shop.



24 hour Mail order service ring 021-373 5945

SAVE UP TO 30%

AND UP TO 70% FROM OUR SPECIAL OFFER LIST

Good quality Engineers tools and Industrial Supplies off the shelf.

Send 9p stamp for your copy of our large

44 PAGE ILLUSTRATED AND PRICED 1979 CATALOGUE

Over 1600 items and 270 illustrations.

Overseas please send three International Coupons or one Dollar

USE YOUR CREDIT CARD, BARCLAYCARD (VISA) OR ACCESS. CHARGE BY MAIL OR BY PHONE



AKRON TOOL SUPPLY CO.

(DEPT. MM) 69 NIGHTINGALE LANE, WANSTEAD LONDON, E11 2EY

Telephone: 01-530 4405/4660

Shop Hours: M-F 9—5.30; Sat. 9.30—12.30

EXPO DRILLS

the miniature tools that do a man-sized job!

Real power, real versatility, real safety — compact, easy-to-use British made Expo 12-volt drills give you top performance at minimum cost for model making, electronics, lapidary, prototype development or small-scale production.

Home & Export Trade enquiries welcome

GET EXPO POWER AT EXPO PRICES!	
Basic Titan drill (torque 350g/cm)	£9.79
Basic Reliant drill (torque 35g/cm)	£6.34
Drill kits (basic drill plus selection of tools and accessories)	from £8.25 to £42.85
Transformer rectifier units	from £9.40
All metal drill stand (convertible for use as lathe)	£11.66
Prices exclude VAT and post and packing	

Ask your local dealer for full details of the complete Expo range of power tools and accessories or write direct to the manufacturers.

EXPO (DRILLS) LTD

Unit 10, Sustanum Works, Titchfield, Hants.
Telephone: 03294-41752

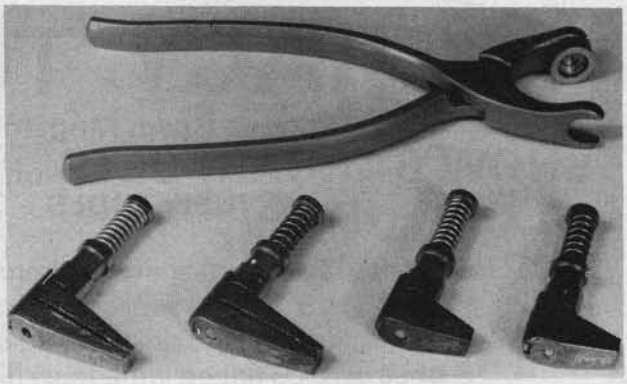

World Patents Pending

FOR THAT EXTRA HAND IN YOUR WORKSHOP OR HOME

Ideal for clamping any material, metal, wood, plastic, laminates, card, paper, fabrics, etc.

Snap on snap off clamps and universal applicator.

Use them when you need that extra hand to do modelmaking, gluing, riveting and drilling.

GENASCO £9.80 incl. pp

Gerald Sadler, **GENASCO.** Inquiries to the Maryland Plant, 1/7 Forest Lane, Stratford, London 15. Telephone 01 534 6055/1160

The LINSAW will cut materials other saws won't even scratch

HARDENED & HIGH SPEED STEEL • TUNGSTEN • STELLITE • GLASS • PORCELAIN • MASONRY

FITS STANDARD HACKSAW FRAME

This sawblade enables precise, intricate cuts in a very wide range of hard, very hard and brittle materials. This is an invaluable and long lasting tool for engineer, D.I.Y. and builder

PLEASE NOTE We are stockists of the ASBO all purpose drill bit, also for MASONRY-GLASS, porcelain steel, etc. Ask for our full list and brochure.

10 blade £3.98
12 blade £4.30
inc. VAT & Post

LABSCIENCE TECHNICAL SERVICES, 20 Ash Hayes Road Nailsea, Avon. Tel: Nailsea 2866 Bristol 292966

(MM) SEND..... 10" 12" BLADE/S PLEASE TICK
MR./MRS.....
.....
.....
PO/CHEQUE ENCLOSED £.....

LABSCIENCE TECHNICAL SERVICES, 28 Ash Hayes Road Nailsea Avon. Tel: Nailsea 2866 Bristol 292966

MODELCRAFT
5 CROSS ST., BLABY LEICS., ENGLAND Tel: 0533 771397

SHOP OPEN: 9-6 Mon-Sat. Closed all day Wednesdays

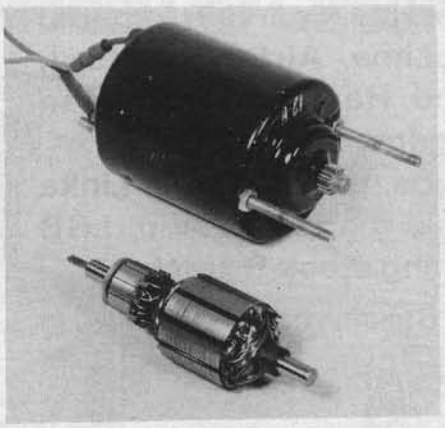

FANTASTIC VALUE
6 volt to 12 volt motors, 10 pole armature. Self aligning endbearings. Thermal cut out, reversible.
3mm output shaft, overall length, 4", diameter 2¼". Normal amperage on load 5 amps. Ideal quality motor for larger boats, etc.

£3.50
p&p 45p

We have comprehensive stocks of Radio Controlled Cars, both I/C and Electric. Scale Boats, fittings and accessories and Stuart Turner, Wilesco, and Unit Steam Engines, in Castings, Machined Castings and Finished Engines.

STUART TURNER CATALOGUE 60p INCL. P&P.

TRACY TOOLS LTD.

58 London Road, Kingston, Surrey Tel: (01) 546-9723

SHOW BARGAIN SETS on Stand 1 at the Model Engineer Exhibition
(NEW TOOLS — UK OR USA MAKE)

Set No.		
1.	33 sizes. Taps, from 2mm to 18mm (list £31.50)	**£10**
2.	53 sizes. H.S.S. long series drills (number sizes) (list £27)	**£9**
3.	54 sizes. H.S.S. stub drills (for rigid drilling) number sizes (list £11.20) ...	**£5**
4.	8 small carbide tipped lathe tools (list £12)	**£4**
5.	6 H.S.S. counter sinks 3/32 to ½ (list £17)	**£5**
6.	8 H.S.S. various convex cutters, 2½" o/d (list £110)	**£15**
7.	9 various 6" files (list £11)	**£5**
8.	6 various 4" files (list £7.50)	**£4**
9.	6 H.S.S. hole deburring cutters, 5/64" to ½" (list £18)	**£5**
10.	0-9 BA tap and die set (as advertised) + 0-6 BA l/hand (list £21) ...	**£8**
11.	25 small taps, No. 1 to ½" UNC, UNF, & A.S. model eng. thread (list £19.60)	**£6**
12.	21 small dies, up to ¼" UNC, UNF, & A.S. model eng. thread (list £20)	**£7**
13.	23 hand and taper pin remers from $\frac{1}{16}$" diameter (list £61)	**£10**

PLUS MANY OTHER BARGAIN SETS

FREE GIFT — VALUE £5 — ON ALL PURCHASES OVER £5

WALK AROUND OUR BARGAIN TOOL SHOP WHILST IN LONDON. SOME DISCONTINUED ITEMS AT UP TO 75% OFF LIST PRICES (FIVE MINUTES KINGSTON STATION OR PUBLIC CAR PARK AT REAR OF SHOP).

G. & W. Machine Tools Ltd

FELMINGHAM, NORTH WALSHAM, NORFOLK

Tel: Aylsham (026373) 2661/2

THE MODERN COMPANY WITH THE OLD FASHIONED SERVICE

Large stocks of New and Used Machine Tools await your inspection

Lathes		
New	Colchester Bantam 800 Lathe c/with std. equip.	£1823
New	Boxford M.E. 10 Lathe c/with std. equip.	£680
New	Myford M.L. 7RB c/with std. equip.	£662
New	Emco Unimat 3 Lathe	£140
Used	Harrison 7" x 60" Gap Bed Lathe with equip.	£775
Used	Colchester Master 6" x 30" Lathe with equip.	£650
New	Rodney Mk 11 Woodturning Lathe	£180
Used	Rodney Mk 11 Woodturning Lathe	£150
Milling Machines		
Used	Hardinge c/with Vert. head 26" x 6½" table	£325
Used	Beaver A 30 Int. Turret Mill, 28" x 6" table	£1200
Used	Centec 2B c/with swiv. vert. head, 5" x 25" table	£525
Used	Shaftesbury Vert. Mill, 7" x 23" table	£450
Saws		
New	Benchmaster Fret Saw with blades	£49
New	Astra Mercury 1 phase Portable Saw	£137
New	Kennedy 3½" Cap. 1 phase Hacksaw	£277
New	Kennedy 2⅜" Cap. 1 phase Hacksaw	£129
Grinders		
New	Whitecote 1 phase 6" Double Ended Bench Grinder	£40
New	Whitecote 1 Phase 8" Double Ended Bench Grinder	£66
New	Whitecote 1 phase 10" Double Ended Bench Grinder	£120
Miscellaneous		
Used	Cabinets 2' 5" wide x 5' 8" high x 2' deep — 100 trays per cabinet ..... each	£40
Used	Wooden Work Benches ..... each	£7
Used	Kopp Band Filer	£35

VAT Extra

FULL STOCK LIST ON REQUEST

YOU COULD DO IT — IF YOU COULD SEE IT

£14.95
(inc. p & p.)

14 days Approval CWO

Send for list of other Optical Aids

And you CAN see with . . .

THE VERSATOR BINOCULAR MAGNIFIER

- Headband mounting leaves both hands free.
- Fully adjustable for position and angle.
- Can be swung up when not in use and is instantly available when required.
- Prismatic lenses relieve the eyes of strain and enable the finest work to be done over long periods.
- Overseas Air Mail at no extra charge.
- Can be used with glasses.
- PRESENT USERS include surgeons, engineers, model makers, horologists, etc.
- THE VERSATOR is supplied to Universities, Technical Colleges Government Departments, Research Establishments and leading firms in industry.
- TRADE ENQUIRES INVITED

Mason & Gantlett Ltd. (Dept. FM), 29 SURREY ST., NORWICH NR1 3NX Tel: (0603) 28101

BLACKGATES ENGINEERING

Model Engineering Supplies

Our shop is one of the few catering solely for the model engineer. The retail counter is open Monday to Saturday every week and we have a world-wide mail order service.

We stock a large range of materials, copper, brass, steel, stainless steel, etc. Also, MAP drawings, castings, 'Jubilee' range of boiler fittings, taps and dies, paint, tools, 'Sievert' equipment, Stuart Turner models, machine tools by 'Myford', 'Boxford', and 'Fobco', 'Arrand' Engineering products and many more.

Full details of our range in our 1979 catalogue.
40p post paid U.K. 70p post paid Overseas.

BLACKGATES ENGINEERING, 209 Wakefield Road, Drighlington Bradford BD11 1EB

Tel: Drighlington 853652 (STD 0532)

All prices plus VAT and postage

"CARTCRAFT" PLANS and WHEELS PACKS

-authentic designs which you can construct without special equipment

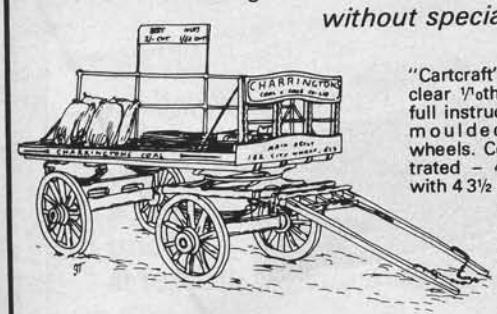

"Cartcraft" packs consist of clear 1/10th scale plans, with full instructions and a set of moulded composition wheels. Coal trolley as illustrated – 4 sheets of plans, with 4 3½ inch wheels, £4 inc. postage.

Illustrated catalogue of plans, books etc., 25p, or $1 by Air Mail to U.S.A.

JOHN THOMPSON, 1 FIELDWAY, FLEET, HANTS

NOW AVAILABLE **— MODEL MECHANICS POWER UNIT KIT — REF. PE 530 K.** 240v. AC input, 8v. 200 mA out. Stabilised. **£2.45** pp 50p extra

Send S.A.E. for Illustrated Leaflet on our range of Electronic Model Railway Controllers.

Also: Details of our Integrated Circuit Photographic Enlarger Timer, PE 131, our Darkroom One Second Pulse Flasher, PE 123, and for quick checking of capacitors, our PE 442 direct reading Capacitor Checker 100 pF — 10 mF, at only **£24.95** post free.

AGW ELECTRONICS LTD
HAYFORD WAY, STAVELEY, DERBYS: 0246 87–3086/7

MODEL & MINIATURE RAILWAYS ROCHDALE

120/122 DRAKE STREET · ROCHDALE · LANCS.
Telephone: Rochdale 45657

Shop Hours: Mon., Thurs. 9.30—5.30; Fri. 9.30—7.30; Sat. 9.30—5.00

Model Engineer Supplies

Brass, copper and steel in sheet section, rounds, squares, hexagons and tube. Phosphur bronze, stainless steel and nickel silver. Screws, nuts, washers, rivets, tools, boiler banding, ½ round beadings. Lubricants and adhesives, solders and fluxes. Stockists of Stuart Turner castings and fittings, Myford lathes and accessories and agents for Boxford. 'N', '00' and '0' gauge model railway equipment.

LOCOMOTIVE AND TRACTION ENGINE CASTINGS

3½" Gauge	5" Gauge	7¼" Gauge	1" Scale Traction Engine
ROB ROY	SPEEDY	HOLMSIDE	MINNIE
DORIS	SIMPLEX		
VIRGINIA	PANSY		
TICH	TORQUAY		
JUBILEE	TITFIELD		
BRITANNIA	THUNDERBOLT		
JULIET	NIGEL GRESLEY		
INVICTA	MABEL		
TITFIELD	MAID OF KENT		
THUNDERBOLT	SPRINGBOK		
MAISIE	METRO		
EVENING STAR	LMS FURY & SCOT		
	SUPER CLAUD		
	BRITANNIA		
	KING		

CASTINGS TO BE AVAILABLE FOR THE NEW ENTERPRISE 5" AND COLUMBIA 3½" as the design progresses.

Castings can also be supplied to your own patterns.

CATALOGUE 60p
OVERSEAS £1.00

MAIL ORDER BY RETURN

Readers' New Years Offers

Super Bargains especially for our readers

MINI BINATONE TAPE RECORDER/ DICTAPHONE

Take notes, record conversation, dictate to your Secretary. Takes 15 minutes each-side tapes.

Normal price £35.00
Our special price £25.00

TRAVELLING ALARM CLOCK

Liquid Crystal alarm digital clock with back-light and snooze feature. Satin finish aluminium case with Leatherette carry pouch.

Normal price £29.95
Our special price £17.95

L.C.D. CLOCK RADIO WITH ALARM

Clock radio AM/FM. L.C.D. clock. Wake to music. Wake to alarm. Snooze facility. Go to sleep with music. Earphones.

Normal price £30.00
Our special price £23.00

COLOUR T.V. GAME

Play Tennis, Hockey, Squash — or just practice by yourself Adjustments for speed of ball, angle of return, bat size, both manual and automatic service facility. Also target practice with gun.

Normal price £22.95
Our special price £13.95

ELECTRONIC K.G.L. QUARTZ WATCH

Electronic watch with five functions. Continuous display of hours and minutes, push once and get the date (American style). Batteries life well in excess of one year.

Normal price £14.95
Our Special price £8.95

ELECTRONIC HANIMEX ALARM CLOCK

Mains operated L.E.D. electronic alarm clock. 9 minute snooze feature. Large L.E.D. display with with bright/dim modes control. 24 hour alarm with on/off control.

Normal price £13.00
Our special price £9.95

Please supply the following Super Bargain items:

- ☐ MINI BINATONE TAPE RECORDER DICTAPHONE
- ☐ COLOUR TV GAME
- ☐ TRAVELLING ALARM CLOCK
- ☐ K.G.L. ELECTRONIC QUARTZ WATCH
- ☐ L.C.D. CLOCK RADIO WITH ALARM
- ☐ HANIMEX ELECTRONIC ALARM CLOCK

(Please write in BLOCK CAPITALS)

Name.....

Address.....

.....

.....

.....

N.B. (i) Please make cheques, etc., payable to Model & Allied Publications Ltd.
(ii) Allow 21 days for delivery.
(iii) Goods found to be faulty will be replaced immediately.

MAP Model & Allied Publications Ltd
Dept. EO, 13/35 Bridge Street, Hemel Hempstead, Herts. HP1 1EE. Tel: (0442) 41221



r/c MODEL CARS

8

Features include TWO electric car reviews Associated RC12E and new British kit Spectron; SG Futura Review; full report of European Championships at Lilford Park; Fiesta Stock Car Meeting at Worthing; Scratch built Stock Car Special; St. Annes 3-hour Team Race for Electrics; Stock Car Topics; Shopping Around Trade News; Club and Track Review; Letters. In fact a real good mixture. The magazine that is all about R/C cars: A5 size (8¼ x 5¾") 56 pages printed on good quality paper, lots of pictures. It costs 50p a copy plus 10p postage. Annual sub (six issues — one every other month) £3.50 UK & Europe. Some copies also available of Issue No. 1 which is of special interest and value to newcomers setting out the R/C model car options, price 50p plus 10p post: or No. 8 Issue plus No. 1 £1.15p in all.

L-D EDITORIAL & TECHNICAL SERVICES LTD., PO BOX 30 HEMEL HEMPSTEAD HP1 1NL

SHOPMATE® 2620A VARIABLE SPEED/FULL TORQUE

DRILL PRESS

Bench mount or carry to job for precision drilling. **£64.95** inc. VAT and carriage

Exclusive features:
- ★ Completely portable! Lightweight and easy to carry! Can be mounted to workbench or used free standing.
- ★ Drills, sands, reams, bores and grinds with accuracy.
- ★ Durable gear driven. Requires no time consuming alignment. No pulleys or belts to wear out.
- ★ Full torque feedback circuit develops and holds full power at all speeds.
- ★ Safe! Actuating switch frozen in "off" position until safety lock is released by chuck key.
- ★ Precision drilling accuracy.
- ★ High impact plastic housing.

SPECIFICATIONS: Capacity 3/8" Steel, ¾" Wood Drilling depth 0 to 2 9/16", Input Watts 310, 1.4 Amps. 0.13 hp (Maximum Motor Output); 700-2,000 rpm; Net Weight 13¼ lb.

★ Supplied with Tilt Table.

PLEASE WRITE FOR FREE LEAFLET



COLIN M. GRANT LTD
33 BALMORE ROAD, GLASGOW G22 6RJ
Tel: 041-336 8741

Save up to 75% off engineers tooling.
Send S.A.E. for Bargain Lists of Special Offers on —
Drills, Taps, Dies, Chasers, Files, Slitting Saws, End Mills, Side and Face Cutters, H.S.S. Tools, Silver Steel, Chucks, Vices, Hacksaws, Verniers, Micrometers, Swiss Files, Carbide Tips, Gauge Steel, Grinders, Magnet Holders, Rotary Tables, Woodruff and Dovetail Cutters.
CALL AND LOOK AROUND OUR NEW LARGE SHOWROOMS – 1000's OF BARGAINS

NEW ALPINE VERTICAL MILLING MAJOR & MINOR

MINOR MILL £575



MODEL	MAJOR	MINOR
Drilling capacity	30mm 1¼"	20mm ¾"
Full-back cutter capacity	3"	2½"
End mill capacity	¾"	13mm ½"
Swing	420mm 16½"	348mm 13 11/16"
Max. distance spindle nose to table	370mm 14½"	320mm 12 5/8"
Spindle japer	M.T NO. 3	M.T. NO. 3
Spindle stroke	130mm 5"	100mm 3 15/16"
Diameter of spindle sleeve	75mm 3"	62mm 2 7/16"
Head swivel	360°	360°
Diameter of column	102mm 4"	92mm 3⅝"

Myford and Boxford New and Used Lathes Millers and Drillers
GRAHAM ENGINEERING LTD
Alpine House, Roebuck Lane, West Bromwich, Nr. Birmingham
Phone: 021-525 3133

THE

MODELLO®

STAND



Head Swivels 360° | SOLID METAL CONSTRUCTION THROUGHOUT | Base Swings 180°

£7-50
plus 50p p&p

Frederick F. Dell
50 Syon Park Gardens, Osterley, TW7 5ND.
01-560 8309

Give him the real thing a steam engine by Mamod.

Magnificent Mamod working steam models are built to give lasting pleasure. A wide range of fabulous road vehicles, stationary engines and accessories to suit boys of all ages, at prices to suit every pocket. Available at leading toy and model shops now!

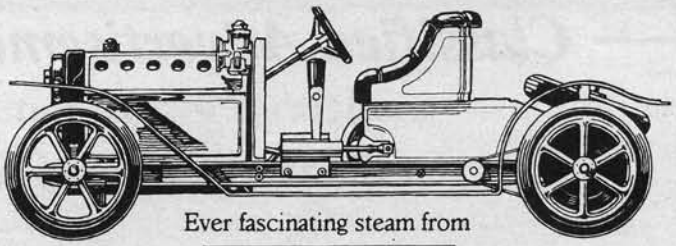

Ever fascinating steam from

Mamod

Malins (Mamod) Ltd., Brierley Hill, West Midlands.

APRONS by MOORFIELD

for all practical subjects

Aprons for Woodwork / Metalwork in 100% Heavy Cotton Drill

Aprons for Housecraft in Cotton Gingham — Bleached Cotton or easy care drip-dry Nylon

ALL DIRECT FROM THE MANUFACTURER

Price List and Brochure available on request to:

MOORFIELD APRONS DIVISION, PERSEVERANCE MILL, OLIVE LANE, DARWEN, LANCASHIRE, BB3 3DS. Tel: 0254 74131

CLASSIFIED advertisements

All classified Advertisements must be pre-paid.
Private and trade rate 12p per word (minimum £2.00). Box Numbers 50p extra. Display box rate £6.25 per column inch (maximum 2"). All advertisements are inserted in the first available issue. Box replies to be sent care of Advertising Department, P.O. Box 35, Bridge Street, Hemel Hempstead, Herts, England HP1 1EE. There are no reimbursements for cancellations.
The Advertising Manager reserves the right to refuse or suspend advertisements without giving any reason. Every care is taken to avoid mistakes, but the publishers cannot be held liable in any way for clerical and printing errors or omissions. Receipt of 'copy' for publication implies acceptance of these conditions by the advertiser. Whilst every care is taken to exclude advertisements from doubtful sources, no responsibility can be accepted by the publishers for the bona fide of advertisers.

TOOLS & EQUIPMENT

PETER CRISP OF RUSHDEN

Tool Department

Myford Lathes and Accessories.
Precision, Hand and Power Tools by leading makers.
Pulleys, Belts and Bearings.
Sureweld Electric Welders and Accessories.
Sievart L.P. Gas Appliances.
Drills, Reamers, Taps and Dies.
M.E. Series our speciality.

20p P.O. for lists Rushden 56424-7

High Street, Rushden, Northants

DON'T BUY YOUR LATHE FROM US!

BEFORE YOU HAVE READ OUR BOOKLET:
"CHOOSING THE RIGHT LATHE FOR ME"
— packed full of tips and hints, on how to choose the best lathe, for yourself. More important, it guides you away from the pitfalls that so often lead you to make a ghastly mistake in your choice.

Send for your copy now! 50p post free from
Northfield Variform Ltd., 11 Dales Drive Colehill, Wimborne, Dorset
By the way, we refund your 50p when you order.

FINE QUALITY TOOLS . . .

. . . and just look at these low, low prices

HSS Twist Drills in sets 1/16" — 1/4" x 1/64" 13 sizes **£3.18**
HSS Square Tool-bits
1/4" x 2 1/2" . . . . . **£3.80 for 8**
5/16" x 2 1/2" . . . . . **£5.13 for 8**
HSS Hacksaw blades
10" x 1/2" 18, 24 or 32 tpi . . . . **£2.30 for 10**
Pocket carbide scribers, retractabled point, marks all hard and soft material **£1.75**
Diamond dressers, for grinding wheels husky 1/4 carat diamond. . . . . **£3.90 each**
All prices include postage and VAT

HIRSH JACOBSON MERCHANDISING CO. LTD.
91 Marylebone High Street, London, W1M 3DE
Tel: 01-935 4709

240v ELECTRIC MOTORS

1/16 h.p. 1425 r.p.m. Split Phase. New	**£8.64**
1/8 h.p. 2850 r.p.m. Cap-start. New	**£8.64**
1/3 h.p. 2850 r.p.m. Split Phase. New	**£16.20**

Prices include VAT Carr. mainland £1.35

FAN & MOTOR CENTRE
65 Sidney Street, London E1 2HH
Tel. 01-247 3710/01-500 4472

BOOKS & PUBLICATIONS

The largest range of MODELBOOKS can be obtained from the following:
*Albion Scott Ltd., 51 York Road, Brentford, Middx. Mon-Fri 9-5.30.
Bewdley Bookshop, 7 Welch Gate, Bewdley, Worcs. Mon-Fri 9-5.30.
Foyle's, Charing Cross Road, London (Dept. 7), Mon-Sat 9-6.
*also world-wide mail order, write for lists.

Authentic Coloured Technical Illustrations

1904 Mercedes 40 (red)
1908 Rolls Royce 40/50 (dark blue)
1915 Model T Ford (black)
1926 Bentley 3 litre (green)
1926 Bugatti 30 (light blue)
1907 Coppa Florio (red)
1928 Mercedes Benz 36/220s (grey)
All available either mounted on black, 9mm blockboard with bevelled edges and with a plastic film face—8 1/2" x 4 1/4"; or set in a black, bevelled mount, behind glass and framed in a 1/2" wide bright gold or silver coloured metal sheathed moulding — 13" x 7". Prices include VAT and postage in UK; add 30p for overseas. BLOCK MOUNTED **85p each.** FRAMED **£2.50 each.** ACCESS & BARCLAYCARD WELCOME. **CURRY & THORNTON LTD.**, Floor 4, India House, Carliol Square, Newcastle, Tyne & Wear NE1 6UF.

GENERAL

STARTING IN R/C?

. . . it should be compulsory reading for the non-modeller wishing to take up radio control flying. The whole style is one of utter practicality . . .'

That's what *Aeromodeller* wrote about
"RADIO CONTROLLED AIRCRAFT"
the only guide written *specifically* for beginners. It covers choice of kit, engine, radio, aerodynamics — everything you need to know. It costs **£1.25** plus 15p SAE, contains a credit voucher *and* details of special offers to beginners. Send for it *before* you make expensive mistakes!

Swansea Models and Hobbies Ltd.
Plymouth Street, Swansea, SA1 3QQ

BUILD YOURSELF A CANNON

Easily assembled kits to build realistic model of Nelson era 32 pounder ships gun. Cast iron barrel, approx. 16" long, weight 15 lb., oak carriage. Also available: 68 pounder Carronade and 13" Mortar kits. Further details, stamp please.

H. L. PEARSON (MM)
5 Ruskin Avenue, The Straits, Sedgley, Dudley, West Midlands DY3 3DN

WHELAN MODELS CATALOGUE 35p

(incl. P&P) for Petrol & Steam Engine Castings, kits, ignition equipment, ready-to-run engines and boilers, manufacturing facility, Books, Plans, also Stuart Turner catalogue 60p incl. P&P.

Whelan Models, Dept. MM, 8 Broadley Park, North Bradley, Trowbridge, Wilts.
Trade and Overseas enquiries welcomed.

JOHN R PROCTOR
65 Buckingham Road, Brighton, Tel: 0273 23696, would like to purchase 'O' gauge and larger model railways.
5 minutes from Brighton Station but phone first please.

Classified Advertisements

From:

.....

.....

.....

I enclose remittance value.....to cover.....

Insertions under the heading:

FOR SALE	☐	SERVICES	☐
TOOLS & EQUIPMENT	☐	COMPONENTS & MATERIALS	☐
BOOKS, PUBLICATIONS, ETC.	☐	WANTED	☐

please tick appropriate heading

To: **MODEL MECHANICS**
CLASSIFIED ADVERTISEMENT DEPT.
P.O. BOX 35, 13 BRIDGE STREET,
HEMEL HEMPSTEAD, HERTS. HP1 1EE

- ★ **Lineage rate 12p a word. Minimum charge £2.00**
- ★ **Semi display single column cm = £2.50 Minimum £6.25 which is 2.5 cm Maximum 5 cm)**
- ★ **Box number 50p extra**

Name and address if to appear must be paid for

BLOCK CAPITALS PLEASE



gloy model colour
for all types of models



gloy

the name that guarantees a quality product

model colours and adhesives

✳ 63-colour range of enamels for modellers and 'touching up'. Gloss, matt, metallics.

✳ Colour thinners for enamels and paints.

✳ Adhesives for model-making, arts and crafts – from balsa and polystyrene cements and tissue paste to glues, cyanoacrylate and epoxies.

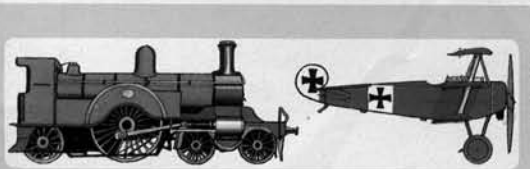

glue with gloy

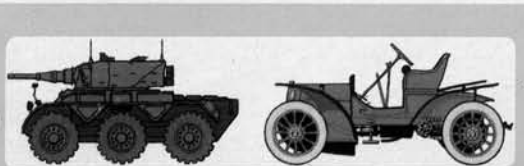

gloy Eighth Avenue Works, London E12 5JW 01-478 0061

for valour

for service

for authenticity

supreme decorations

HUMBROL

A range of 200 Authentic colours covering Railways, Aircraft, Ships, AFV's and Military subjects.